
K-T-VB PP
Union tees

Savybės

Darbinis slėgis	on request
Darbinė temperatūra	Max. +20 °C
Medžiaga	Polypropylene (PP)
Sandarinimo medžiaga	NBR



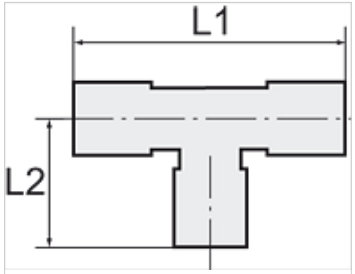

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Prekė

Pavadinimas	žarnos išoriniam Ø	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7