


# K-Y-WINKELVERSCH DER IG AG-K

Male branch Y-elbows, swivel type, parallel female thread and conical male thread, coated



| Savybės                 |                                                                                |
|-------------------------|--------------------------------------------------------------------------------|
| Darbinis slėgis         | Max. 15 bar, coarse vacuum                                                     |
| Taikymo sritys          | Air, vacuum                                                                    |
| rekomenduojamos žarnos  | PU or PA (nylon)                                                               |
| Medžiagos               | Compressed air and all gases or liquids that are compatible with the materials |
| Temperatūros diapazonas | -20 °C to +80 °C                                                               |
| Sandarinimo paviršius   | Conical version: thread coating                                                |
| Medžiaga                | Plastic, Nickel plated brass                                                   |
| Prispaudimo žiedas      | Plastic                                                                        |

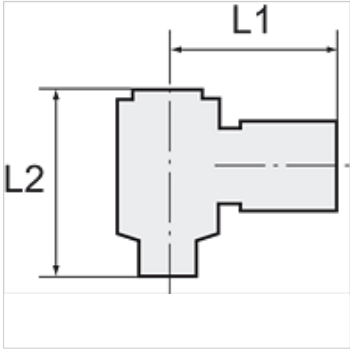

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

| Prekė          |         |                    |            |            |                  |
|----------------|---------|--------------------|------------|------------|------------------|
| Pavadinimas    | Sriegis | žarnos išoriniam Ø | L1<br>(mm) | L2<br>(mm) | SW (rakto dydis) |
| K- 07 40 43 23 | G/R 1/8 | 6 mm               | 24,0       | 30,5       | 14 mm            |
| K- 07 40 43 22 | G/R 1/4 | 8 mm               | 28,5       | 36,0       | 17 mm            |
| K- 07 40 43 24 | G/R 3/8 | 10 mm              | 33,7       | 42,3       | 21 mm            |
| K- 07 40 43 21 | G/R 1/2 | 12 mm              | 37,5       | 51,0       | 24 mm            |