

K-T-VB VA

Union tees, stainless steel

Savybės

Slėgio diapazonas	Max. 25 bar
rekomenduojamos žarnos	PTFE hose
Temperatūros diapazonas	-40 °C to +200 °C (depending on the hose quality and diameter)
Medžiaga	nerūdijantis plienas 1.4404
Tarpiklis	Pure metal



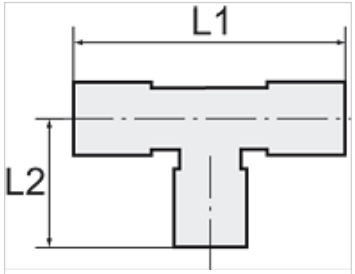

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Supplied without seals. For use with corrosive media and at high temperatures. Screw fitting series made of stainless steel for all applications where compliance with strict tightness, pressure and temperature requirements is essential. The parts are manufactured without rubber seals, in other words they are ideal for very high temperatures or for use with corrosive liquids, e.g. in cases when FPM is no longer suitable.

Prekė

Pavadinimas	žarnai	L1 (mm)	L2 (mm)	SW1 (mm)	SW2 (mm)
K- 07 40 30 46	6 mm / 4 mm	46,0	22,5	12	10
K- 07 40 30 47	8 mm / 6 mm	46,0	23,0	14	10
K- 07 40 30 45	10 mm / 8 mm	52,0	26,0	16	12

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.