
K-WTEH SERIE ONE M DRS

Service units, »ONE« Series, with pressure switch

Savybės

Įėjimo slėgis	Max. 10 bar
Temperatūros diapazonas	-10 °C to +50 °C
Medžiagos	suslėgtas oras
Apsaugos rūšis	IP 65
Darbinis slėgis	0.5 - 8 bar
Spaudžiamasis jungiklis	Changeover contact
Porų plotis filtro elemente	20 µm
Srauto reikšmės matavimas	At 6,3 bar and Δp = 1 bar



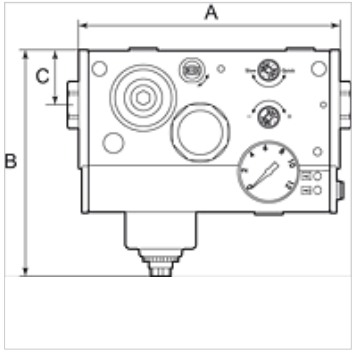

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

užsakymo nuorodos

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

Prekė

Pavadinimas	Jungtis	Srautas (L/min)	A (mm)	B	C (mm)	Įtampa
K- 07 25 13 82	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 83	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 84	G 1/2	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.