

# K-RD STUECKE PP

Reducers

**HANSA FLEX**


## Savybės

Darbinis slėgis on request

Darbinė temperatūra Max. +20 °C

Medžiaga Polypropylene (PP)

Sandarinio medžiaga NBR

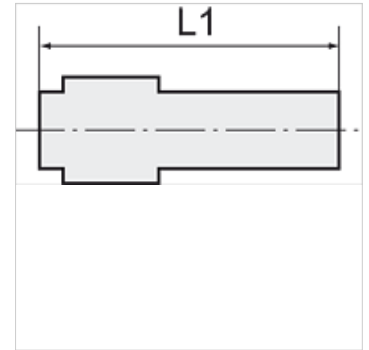

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Prekė

Pavadinimas	žarnos išoriniam Ø	L1 (mm)	Atvamzdžiai (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32