


K-DRV ABLD RAENDEL DREH BESCH

Unidirectional flow control valves with outgoing air restriction, adjustable with knurled screw, angled, swivel type, conical male thread, coated

HANSA FLEX

Savybės

Darbinis slėgis	Max. 15 bar, coarse vacuum
Taikymo sritys	Air, vacuum
rekomenduojamos žarnos	PU or PA (nylon)
Medžiagos	Compressed air and all gases or liquids that are compatible with the materials
Temperatūros diapazonas	-20 °C to +80 °C
Sandarinimo paviršius	Parallel version: O-ring in housing, Conical version: thread coating
Medžiaga	Plastic, Nickel plated brass
Prispaudimo žiedas	Plastic

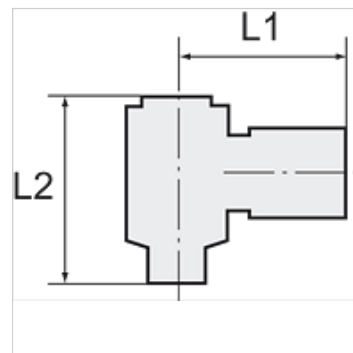

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Prekė

Pavadinimas	Sriegis	žarnos išoriniam Ø	L1 (mm)	L2 min. (mm)	L2 maks. (mm)	SW (rakto dydis)
K- 07 40 07 32	R 1/8	4 mm	22,3	37,8	44,0	10 mm
K- 07 40 07 33	R 1/8	6 mm	22,9	37,8	44,0	10 mm
K- 07 40 07 34	R 1/8	8 mm	24,8	37,8	44,0	10 mm
K- 07 40 07 31	R 1/8	10 mm	30,1	37,8	44,0	10 mm
K- 07 40 07 28	R 1/4	4 mm	24,1	44,0	51,0	14 mm
K- 07 40 07 29	R 1/4	6 mm	24,9	44,0	51,0	14 mm
K- 07 40 07 30	R 1/4	8 mm	28,4	44,0	51,0	14 mm
K- 07 40 07 26	R 1/4	10 mm	32,0	44,0	51,0	14 mm
K- 07 40 07 27	R 1/4	12 mm	32,0	44,0	51,0	14 mm
K- 07 40 07 37	R 3/8	6 mm	26,6	48,7	55,0	19 mm
K- 07 40 07 38	R 3/8	8 mm	29,2	48,7	55,0	19 mm
K- 07 40 07 35	R 3/8	10 mm	32,5	48,7	55,0	19 mm
K- 07 40 07 36	R 3/8	12 mm	35,3	48,7	55,0	19 mm
K- 07 40 07 24	R 1/2	6 mm	29,6	53,0	59,2	24 mm
K- 07 40 07 25	R 1/2	8 mm	32,3	53,0	59,2	24 mm
K- 07 40 07 22	R 1/2	10 mm	35,5	53,0	59,2	24 mm
K- 07 40 07 23	R 1/2	12 mm	36,3	53,0	59,2	24 mm