


# K-T-MEHRF-VERT DREH AG O

Tee distributors with parallel male thread, with O-ring, swivel type

**HANSA FLEX**

## Savybės

|                         |  |
|-------------------------|--|
| Darbinis slėgis         | Max. 15 bar, coarse vacuum   |
| Taikymo sritys          | Air, vacuum  |
| rekomenduojamos žarnos  | PU or PA (nylon)   |
| Medžiagos               | Compressed air and all gases or liquids that are compatible with the materials |
| Temperatūros diapazonas | -20 °C to +80 °C   |
| Sandarinimo paviršius   | Parallel version: O-ring in housing  |
| Medžiaga                | Plastic, Nickel plated brass   |
| Prispaudimo žiedas      | Plastic  |

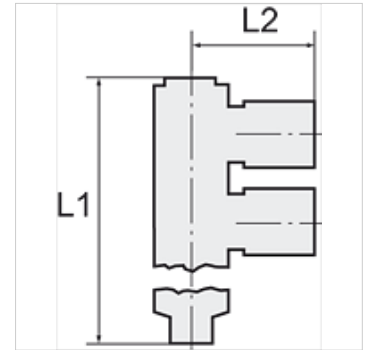

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Prekė

| Pavadinimas    | Sriegis | žarnos išoriniam Ø   | L1 (mm) | L2 (mm) | SW (rakto dydis) |
|----------------|---------|----------------------|---------|---------|------------------|
| K- 07 40 04 29 | G 1/8   | 1 x 6 mm / 3 x 4 mm  | 64,3    | 19,0    | 14 mm            |
| K- 07 40 42 10 | G 1/4   | 1 x 6 mm / 3 x 4 mm  | 65,2    | 19,6    | 14 mm            |
| K- 07 40 04 27 | G 1/4   | 1 x 8 mm / 3 x 4 mm  | 69,9    | 20,0    | 17 mm            |
| K- 07 40 04 28 | G 1/4   | 1 x 8 mm / 3 x 6 mm  | 71,4    | 20,0    | 17 mm            |
| K- 07 40 42 11 | G 3/8   | 1 x 8 mm / 3 x 6 mm  | 70,9    | 20,6    | 17 mm            |
| K- 07 40 04 30 | G 3/8   | 1 x 10 mm / 3 x 8 mm | 91,1    | 24,0    | 20 mm            |