


# K-TL-STECK VERS DRE MINI PAR

Male branch tee, swivel type, mini, parallel thread

**HANSA FLEX**

## Savybės

<b>Darbinis slėgis</b>	Max. 10 bar, vacuum
<b>Taikymo sritys</b>	Air, vacuum
<b>rekomenduojamos žarnos</b>	PU or PA (nylon)
<b>Medžiagos</b>	suslėgtas oras
<b>Norma</b>	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
<b>Temperatūros diapazonas</b>	0 °C to +60 °C
<b>Sandarinimo paviršius</b>	O-ring (NBR)
<b>Medžiaga</b>	Plastic, Nickel plated brass
<b>Prispaudimo žiedas</b>	Plastic

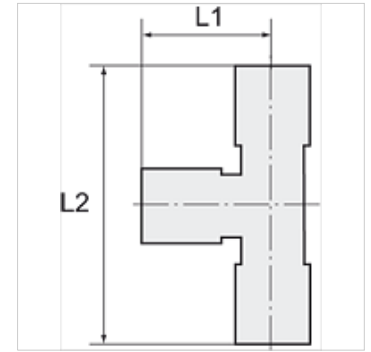

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

## Prekė

Pavadinimas	Sriegis	žarnos išoriniam Ø	L1 (mm)	L2 (mm)	SW (rakto dydis)
K- 07 40 23 28	M 3	3 mm	12,0	28,0	8 mm
K- 07 40 23 29	M 3	4 mm	14,0	31,2	8 mm
K- 07 40 23 30	M 5	3 mm	12,0	28,0	8 mm
K- 07 40 23 31	M 5	4 mm	14,0	31,2	8 mm
K- 07 40 23 32	M 5	6 mm	14,5	32,7	8 mm
K- 07 40 23 33	M 6	3 mm	12,0	28,5	10 mm
K- 07 40 23 34	M 6	4 mm	14,0	31,6	10 mm
K- 07 40 23 35	M 6	6 mm	14,5	33,1	10 mm
K- 07 40 23 36	G 1/8	4 mm	14,0	30,5	13 mm
K- 07 40 23 37	G 1/8	6 mm	16,0	32,5	13 mm
K- 07 40 23 38	R 1/8	4 mm	14,0	32,0	10 mm
K- 07 40 23 39	R 1/8	6 mm	14,5	33,5	10 mm