


# K-L-MEHRFACHVERT 2 DR AGR OR

Multiple union elbows with outer hex, 2 outlets, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Savybės

|                         |                                                                                |
|-------------------------|--------------------------------------------------------------------------------|
| Darbinis slėgis         | Max. 15 bar, coarse vacuum                                                     |
| Taikymo sritys          | Air, vacuum                                                                    |
| rekomenduojamos žarnos  | PU or PA (nylon)                                                               |
| Medžiagos               | Compressed air and all gases or liquids that are compatible with the materials |
| Temperatūros diapazonas | -20 °C to +80 °C                                                               |
| Sandarinimo paviršius   | Parallel version: O-ring in housing                                            |
| Medžiaga                | Plastic, Nickel plated brass                                                   |
| Prispaudimo žiedas      | Plastic                                                                        |

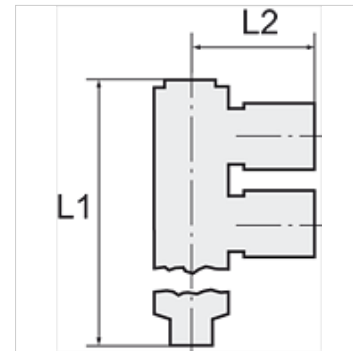

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Prekė

| Pavadinimas    | Sriegis | žarnos išoriniam Ø | Vidinis šešiabriaunis (mm) | L1 (mm) | L2 (mm) | SW (rakto dydis) |
|----------------|---------|--------------------|----------------------------|---------|---------|------------------|
| K- 07 40 06 01 | G 1/8   | 4 mm               | 4,0                        | 43,8    | 22,5    | 14 mm            |
| K- 07 40 06 02 | G 1/8   | 6 mm               | 4,0                        | 43,8    | 21,5    | 14 mm            |
| K- 07 40 06 03 | G 1/8   | 8 mm               | 4,0                        | 43,8    | 24,5    | 14 mm            |
| K- 07 40 42 72 | G 1/4   | 4 mm               | 6,0                        | 58,0    | 24,7    | 17 mm            |
| K- 07 40 05 99 | G 1/4   | 6 mm               | 6,0                        | 58,0    | 23,5    | 17 mm            |
| K- 07 40 06 00 | G 1/4   | 8 mm               | 6,0                        | 58,0    | 26,5    | 17 mm            |
| K- 07 40 05 97 | G 1/4   | 10 mm              | 6,0                        | 58,0    | 29,9    | 17 mm            |
| K- 07 40 05 98 | G 1/4   | 12 mm              | 6,0                        | 58,0    | 30,8    | 17 mm            |
| K- 07 40 42 73 | G 3/8   | 4 mm               | 8,0                        | 59,5    | 24,5    | 20 mm            |
| K- 07 40 42 74 | G 3/8   | 6 mm               | 8,0                        | 59,5    | 23,6    | 20 mm            |
| K- 07 40 06 06 | G 3/8   | 8 mm               | 8,0                        | 60,7    | 28,5    | 20 mm            |
| K- 07 40 06 04 | G 3/8   | 10 mm              | 8,0                        | 60,7    | 31,9    | 20 mm            |
| K- 07 40 06 05 | G 3/8   | 12 mm              | 8,0                        | 60,7    | 32,8    | 20 mm            |
| K- 07 40 42 71 | G 1/2   | 8 mm               | 8,0                        | 64,2    | 28,5    | 24 mm            |
| K- 07 40 42 69 | G 1/2   | 10 mm              | 8,0                        | 64,2    | 34,7    | 24 mm            |
| K- 07 40 42 70 | G 1/2   | 12 mm              | 8,0                        | 64,2    | 35,4    | 24 mm            |