



# HK CFS

Dakšveida galva, īsā

**HANSA FLEX**

## Īpašības

**Materiāls** Tērauds S355J0 (Fe510C)

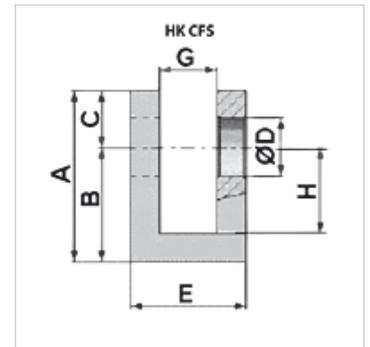

## Izstrādājums

Apzīmējums	A (mm)	B (mm)	C (mm)	E (mm)	G (mm)	H (mm)	Ø D (mm)	Platums (mm)	Svars (kg)
HK CFS 00000 16	50,00	34,00	16,0	35,00	16,00	24,0	16,20	35,0	0,27
HK CFS 00000 20	60,00	40,00	20,0	40,00	20,00	30,0	20,25	40,0	0,38
HK CFS 00000 25	70,00	45,00	25,0	50,00	25,00	30,0	25,25	50,0	0,71
HK CFS 00000 30	80,00	50,00	30,0	60,00	30,00	35,0	30,25	60,0	1,10
HK CFS 00000 35	90,00	55,00	35,0	70,00	35,00	40,0	35,25	70,0	1,60
HK CFS 00000 40	110,00	70,00	40,0	80,00	40,00	50,0	40,25	80,0	2,70
HK CFS 00000 50	145,00	95,00	50,0	100,00	50,00	60,0	50,50	100,0	5,86
HK CFS 00000 60	160,00	105,00	60,0	110,00	60,00	55,0	60,50	110,0	7,10