

K-DICHTRINGE PTFE


Sealing rings, PTFE (PTFE), max. temperature 260 °C

HANSA FLEX

Īpašības

Temperatūra Max. +260 °C

Materiāls PTFE

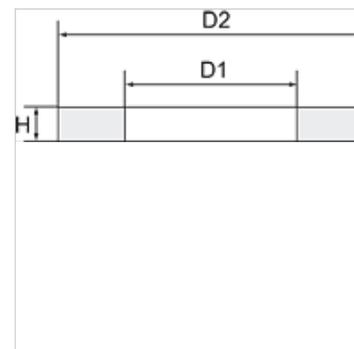

Norāde

Citi dati pieejami pēc pieprasījuma.

Pasūtījuma norādes

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Izstrādājums

Apzīmējums	vītnei	D1 (mm)	D2 (mm)	H (mm)
K- 07 10 03 16	M 5	5,1	8,0	1,0
K- 07 10 03 20	G 1/2	21,0	28,0	1,5
K- 07 10 03 18	G 1/4	13,2	18,0	1,5
K- 07 10 03 19	G 3/8	16,8	22,0	1,5
K- 07 10 03 22	G 1	33,3	38,9	2,0
K- 07 10 03 21	G 3/4	26,5	33,0	2,0
K- 07 10 03 17	G 1/8	10,0	13,0	1,5