

K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer


HANSA FLEX

Īpašības

Īpašības Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%)
Connection of compressed air and vacuum with push-in coupling
Basic housing with connection facility for a vacuum switch
Maximum suction capacity with minimum compressed air consumption
Minimum size, low weight
Various power ratings for optimised air consumption

Izmantošana For universal use in handling systems with very high dynamic movements
Handling all kinds of air-tight components
For use in separation systems where space is restricted.
Construction of ejector blocks for centralised or decentralised individual control of suction pads.

Sprauslu sistēma	Brass
Savienojums	Push-in coupling
Trokšņu slāpētājs	Plastic
Pamatkorpuss	Impact-resistant plastic

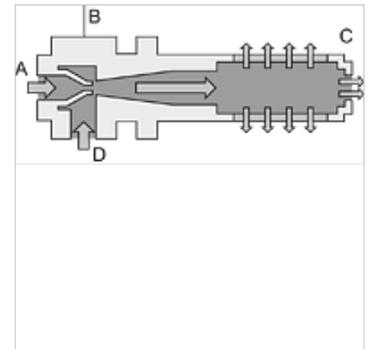

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Izstrādājums

Apzīmējums	Sprauslu izmērs	Iesūkšanas vārsts miera stāvoklī	Saspiegtā gaisa pieslēgums	Vakuuma pieslēgums	Izmērs
K- 07 45 01 20	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 22	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 24	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K- 07 45 01 26	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

Piederumi

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit