

K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

HANSA FLEX

Īpašības


Īpašības Vacuum generator with high maximum vacuum level (85% vacuum)
No moving parts, which means no wear and no maintenance
ultra small footprint, suitable for confined spaces
minimal air consumption
low noise

Izmantošana by screwing / plugging into the distribution beam
direct attachment to the suction pad
for handling various workpieces

Korpuss Aluminium eloxed (type VR)

Sprauslu sistēma Brass (type VR)

Savienojums Spraudsavienojums

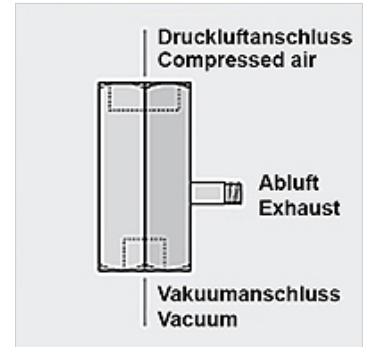

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

For vacuum generation directly at the point of use. For direct installation between the VR suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Izstrādājums

Apzīmējums	Sprauslu izmērs	Gaisa izvades pieslēgums	Saspiestā gaisa pieslēgums	Vakuuma pieslēgums	Iztukšošanas pakāpe	Sūkšanas gaisa patēriņš (L/min)	maks. sūkšanas apmērs (L/min)	Garums (mm)	Ekspluatācijas spiediens (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0