

K-INLINE-EJEKTTOREN SLP

Inline ejectors »SLP«, plug connection

Īpašības

Īpašības	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption \nlow noise
Izmantošana	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Korpuss	plastic (Typ SLP)
Sprauslu sistēma	Brass (type VR)
Savienojums	thread connector



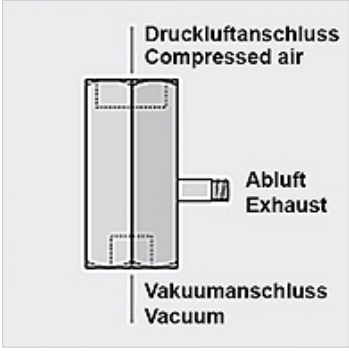

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Izstrādājums

Apzīmējums	Sprauslu izmērs	Gaisa izvades pieslēgums	Saspiestā gaisa pieslēgums	Vakuuma pieslēgums	Iztukšošanas pakāpe	Sūkšanas gaisa patēriņš (L/min)	maks. sūkšanas apmērs (L/min)	Garums (mm)	Ekspluatācijas spiediens (bar)
K- 07 45 01 27	0,5	-	4 mm	4 mm	85 %	13,0	8,0	57,0	4,5
K- 07 45 01 28	0,7	-	4 mm	4 mm	85 %	25,0	16,0	57,0	4,5

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.