

K-KOMPAKTEJEKTOREN MINI

Mini-compact ejectors

HANSA FLEX

Īpašības

Īpašības


- Vacuum generator with integrated control valves and system monitoring functions
- Gripping and blowing off can be controlled without the need for external valves
- Optimised air consumption thanks to many models with differing suction capacities
- Minimum energy costs in continuous operation
- Easy adjustment with foil keypad, LED display of the settings
- Minimum size and low weight
- Optimum vacuum generation directly on the suction pad
- Complete solution for very simple installation
- Short learning curve thanks to "teach" function
- No need for additional sensors
- Easily visible status indication

Izmantošana Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems

Iztukšošanas pakāpe 85 %

Pamatkorpuss Anodised aluminium

Iebūvēts NC blow-off valve, filter, silencer, non-return valve

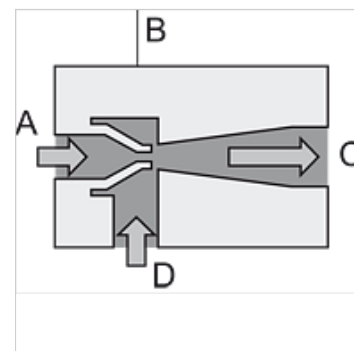

Norāde

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Citi dati pieejami pēc pieprasījuma.

Apraksts

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Papildu informācija

Important: Order two connection plugs per ejector.

Izstrādājums

Apzīmējums	Sprauslu izmērs	Iesūkšanas vārsta miera stāvoklī	Saspiestā gaisa pieslēgums	Vakuuma pieslēgums	Sūkšanas gaisa patēriņš (L/min)	maks. sūkšanas apmērs (L/min)	Izmērs	Eksploatācijas spiediens (bar)
K- 07 45 01 46	1,0	NC	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5
K- 07 45 01 45	1,0	NO	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5

Piederumi

K-ANSCHLUSSSTECK MAGNETVE 1	Connection plug for solenoid valves
K-ERSATZSCHALLDAEMPFER	Replacement silencers
K-ERSATZFILTERELEMENTE 1	Replacement filter element