

K-KOMPAKTEJEKTOREN MINI


Mini-compact ejectors

HANSA FLEX

Īpašības

Īpašības

- Vacuum generator with integrated control valves and system monitoring functions
- Gripping and blowing off can be controlled without the need for external valves
- Optimised air consumption thanks to many models with differing suction capacities
- Minimum energy costs in continuous operation
- Easy adjustment with foil keypad, LED display of the settings
- Minimum size and low weight
- Optimum vacuum generation directly on the suction pad
- Complete solution for very simple installation
- Short learning curve thanks to "teach" function
- No need for additional sensors
- Easily visible status indication

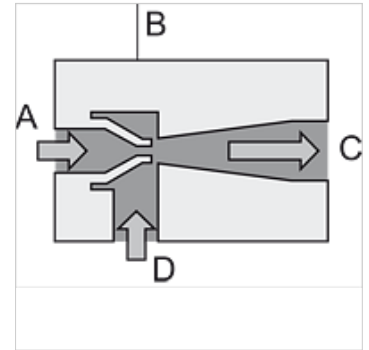

| | |
|----------------------------|---|
| Izmantošana | Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems |
| Iztukšošanas pakāpe | 85 % |
| Pamatkorpuss | Anodised aluminium |
| Iebūvēts | NC blow-off valve, filter, silencer, non-return valve |

Norāde

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Citi dati pieejami pēc pieprasījuma.

Apraksts

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Papildu informācija

Important: Order two connection plugs per ejector.

Izstrādājums

| Apzīmējums | Sprauslu izmērs | Iesūkšanas vārsta miera stāvoklī | Saspiestā gaisa pieslēgums | Vakuuma pieslēgums | Sūkšanas gaisa patēriņš (L/min) | maks. sūkšanas apmērs (L/min) | Izmērs | Eksploatācijas spiediens (bar) |
|----------------|-----------------|----------------------------------|----------------------------|--------------------|---------------------------------|-------------------------------|---------------------|--------------------------------|
| K- 07 45 01 46 | 1,0 | NC | M 5 IG | M5 female | 46,0 | 23,0 | 65mm x 10mm x 107mm | 4,5 |
| K- 07 45 01 45 | 1,0 | NO | M 5 IG | M5 female | 46,0 | 23,0 | 65mm x 10mm x 107mm | 4,5 |

Piederumi

| | |
|------------------------------------|-------------------------------------|
| K-ANSCHLUSSSTECK MAGNETVE 1 | Connection plug for solenoid valves |
| K-ERSATZSCHALLDAEMPFER | Replacement silencers |
| K-ERSATZFILTERELEMENTE 1 | Replacement filter element |