



K-VSTOK 4

Plugs, square

HANSA FLEX

Īpašības

| | |
|-----------------|------------------------------|
| Darba spiediens | Max. 20 bar |
| Ārējā vītne | Parallel to DIN EN ISO 228-1 |
| Materiāls | Stainless steel 1.4408 |

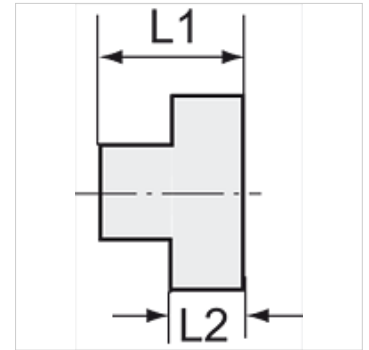

Norāde

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Citi dati pieejami pēc pieprasījuma.

Izstrādājums

| Apzīmējums | Vītne | L1 (mm) | L2 (mm) | SW |
|----------------|---------|------------|------------|-------|
| K- 07 40 39 73 | G 1/8 | 13,9 | 7,0 | 6 mm |
| K- 07 40 39 74 | G 1/4 | 19,4 | 11,2 | 9 mm |
| K- 07 40 39 75 | G 3/8 | 17,8 | 10,0 | 10 mm |
| K- 07 40 39 76 | G 1/2 | 25,0 | 15,8 | 14 mm |
| K- 07 40 39 77 | G 3/4 | 28,0 | 17,0 | 17 mm |
| K- 07 40 39 78 | G 1 | 31,0 | 19,0 | 19 mm |
| K- 07 40 39 79 | G 1 1/4 | 35,0 | 21,9 | 23 mm |
| K- 07 40 39 80 | G 1 1/2 | 36,0 | 21,9 | 26 mm |
| K- 07 40 39 81 | G 2 | 40,4 | 25,4 | 32 mm |