


# K-REDUZIERSTUTZEN POM

Hose connectors, unequal, POM

**HANSA FLEX**

## Īpašības

Temperatūras diapazons -40 °C to +90 °C

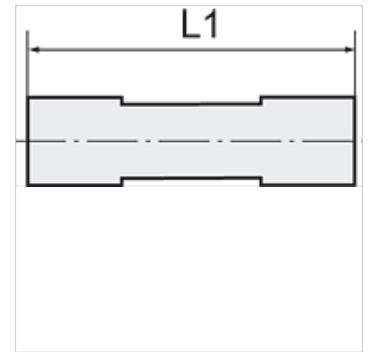

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Lightweight tube connectors distinguished by high strength, toughness, resistance to abrasion and impact resistance. Resistant to: Acetone, benzene, benzene, butane, alcohols, diesel fuels, crude oil, natural gas, ethanol, fruit juices, glycerine, fuel oil, hydraulic fluids, aliphatic ketones, carbon dioxide, carbonic acid, engine oils, methanol, propane, liquefied gas, lubricating oils, lubricating greases, town gas, washing liquor and water.

## Izstrādājums

Apzīmējums	šļūtenei	L1 (mm)	maks. pieļaujamais pārspiediens (bar)
K- 07 40 17 10	LW 4 mm / 3 mm	30,0	10
K- 07 40 17 11	LW 6 mm / 4 mm	42,5	10
K- 07 40 17 12	LW 8 mm / 4 mm	48,0	10
K- 07 40 17 13	LW 8 mm / 6 mm	54,0	10
K- 07 40 17 14	LW 10 mm / 6 mm	58,0	10
K- 07 40 17 15	LW 10 mm / 8 mm	60,5	10
K- 07 40 17 16	LW 12 mm / 8 mm	62,5	10
K- 07 40 17 17	LW 12 mm / 10 mm	64,0	10