

K-T-TUE
Tee hose connectors

Īpašības

Ekspluatācijas spiediens	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)
Skrūvelements	Polyamide (PA)
Spīļgredzens	Polypropylene (PP)
Uzgrieznis	Polypropylene (PP)



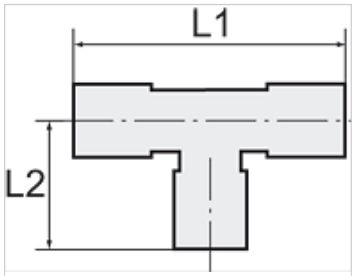

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzine, diesel oil, fuel oil and alkalis.
Not suitable for use with acids.

Izstrādājums

Apzīmējums	šļūtenei	L1 (mm)	L2 (mm)
K- 07 40 32 70	4 mm / 6 mm	52,0	26,0
K- 07 40 32 71	6 mm / 8 mm	62,0	31,0
K- 07 40 32 72	8 mm / 10 mm	72,0	36,0
K- 07 40 32 73	9 mm / 12 mm	80,0	40,0

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.