

# K-T-VERSCHR HS

Branch tees, pipe connection on all sides



**HANSA FLEX**

## Īpašības

Splēdiena diapazons Max. 60 bar

Temperatūra Max. 150 °C

Materiāls Nikelēts misiņš

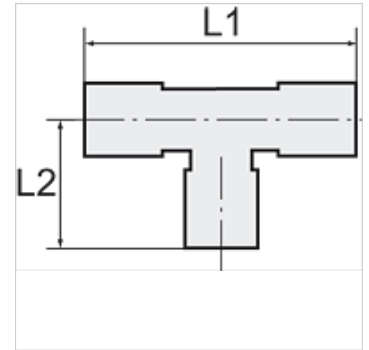

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Izstrādājums

Apzīmējums	Caurules ārējais Ø	L1 (mm)	L2 (mm)	SW	SW1 (mm)
K- 07 40 19 95	4 mm	44,0	21,0	9 mm	10
K- 07 40 19 96	6 mm	46,0	23,0	9 mm	12
K- 07 40 19 97	8 mm	48,0	24,0	11 mm	14
K- 07 40 19 98	10 mm	64,0	32,0	13 mm	19
K- 07 40 19 99	12 mm	69,0	34,5	15 mm	22
K- 07 40 20 00	15 mm	76,0	38,0	17 mm	27
K- 07 40 20 01	18 mm	88,0	44,0	22 mm	32