

# K-L-AGR-K OR DRH

Male run tees, conical male thread acc. to ISO 7-1


**HANSA FLEX**

## Īpašības

Darba spiediens Max. 18 bar

Bīvēšanas materiāls Buna-N

Materiāls Nikelēts misiņš

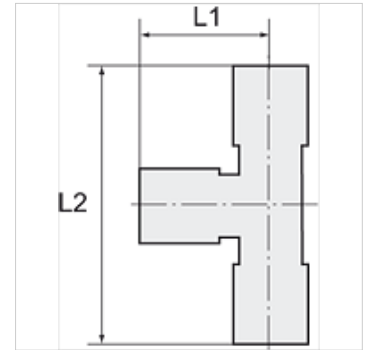

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Izstrādājums

| Apzīmējums     | Vītnes | šļūtenei      | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|--------|---------------|------------|------------|-------|
| K- 07 40 42 27 | R 1/8  | 5 mm / 3 mm   | 21,5       | 38,5       | 8 mm  |
| K- 07 40 42 28 | R 1/8  | 6 mm / 4 mm   | 22,0       | 39,0       | 9 mm  |
| K- 07 40 42 29 | R 1/8  | 8 mm / 6 mm   | 22,0       | 39,0       | 12 mm |
| K- 07 40 32 21 | R 1/4  | 6 mm / 4 mm   | 22,0       | 42,0       | 9 mm  |
| K- 07 40 32 22 | R 1/4  | 8 mm / 6 mm   | 22,0       | 42,0       | 12 mm |
| K- 07 40 32 20 | R 1/4  | 10 mm / 8 mm  | 25,5       | 41,0       | 11 mm |
| K- 07 40 42 32 | R 3/8  | 8 mm / 6 mm   | 23,0       | 45,0       | 12 mm |
| K- 07 40 42 30 | R 3/8  | 10 mm / 8 mm  | 25,0       | 47,0       | 12 mm |
| K- 07 40 42 31 | R 3/8  | 12 mm / 10 mm | 31,0       | 55,0       | 17 mm |
| K- 07 40 42 25 | R 1/2  | 10 mm / 8 mm  | 28,5       | 54,5       | 17 mm |
| K- 07 40 42 26 | R 1/2  | 12 mm / 10 mm | 31,0       | 57,0       | 17 mm |