


# K-SDR AG

Banjo elbows, parallel male thread

**HANSA FLEX**

## Īpašības

maks. ekspluatācijas spiediens	18 bar
izmantojamās šļūtenes	PA, PE, PU
Materiāls	Niķelēts misiņš

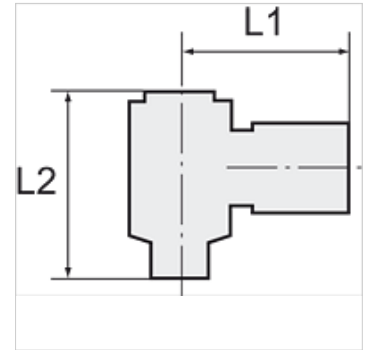

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Izstrādājums

Apzīmējums	Vītnes	šļūtenei	L1 (mm)	L2 (mm)	SW
K- 07 40 33 99	M 5	5 mm / 3 mm	17,0	17,5	8 mm
K- 07 40 34 00	M 5	6 mm / 4 mm	18,0	17,5	8 mm
K- 07 40 34 04	G 1/8	6 mm / 4 mm	24,0	28,0	14 mm
K- 07 40 34 05	G 1/8	8 mm / 6 mm	24,0	28,0	14 mm
K- 07 40 34 02	G 1/4	6 mm / 4 mm	26,0	29,5	17 mm
K- 07 40 34 03	G 1/4	8 mm / 6 mm	26,0	29,5	17 mm
K- 07 40 34 01	G 1/4	10 mm / 8 mm	27,5	33,0	17 mm
K- 07 40 34 07	G 3/8	8 mm / 6 mm	27,5	31,5	22 mm
K- 07 40 34 06	G 3/8	10 mm / 8 mm	28,5	31,5	22 mm