

K-W90 VERSCHR AG-K ISO 7-1 POM BLAU


Union elbows, rigid, conical male thread acc. to ISO 7-1

HANSA FLEX

Īpašības

Ekspluatācijas spiediens 0 - 10 bar

Temperatūras diapazons -10 °C to +60 °C

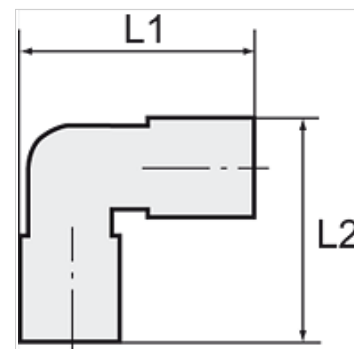

Norāde

Citi dati pieejami pēc pieprasījuma.

Izstrādājums

Apzīmējums	Vītnes	šļūtenei	L1 (mm)	L2 (mm)
K- 07 40 33 28	R 1/8	6 mm / 4 mm	23,0	16,0
K- 07 40 33 29	R 1/8	8 mm / 6 mm	23,0	17,0
K- 07 40 33 30	R 1/4	6 mm / 4 mm	24,0	19,0
K- 07 40 33 31	R 1/4	8 mm / 6 mm	25,0	20,0
K- 07 40 33 32	R 1/4	12 mm / 9 mm	28,0	23,0
K- 07 40 33 33	R 3/8	12 mm / 9 mm	28,0	23,0