


K-PRAEZI DRUCKREGL PNEU FERN

Precision pressure regulators

HANSA FLEX

Īpašības

ļeejas spiediens	Max. 16 bar
Vielas temperatūra	max. 60 °C
Vides temperatūra	Max. 60 °C
Darba vides	Micro-filtered, unoiled compressed air (0.01 µm)
Manometra pieslēgums	G 1/4
Caurplūde	3000 l/min
Atgaisošanas pieslēgums	G 3/8 (for mounting a silencer)
Regulēšanas spiediens	Max. 10 bar
Regulēšanas gaisa pieslēgums	G 1/8
Bļīvēšanas materiāls	NBR
Korpuss	Die-cast zinc, painted black
Iekšējā gaisa patēriņš	6 l/min at Pin = 16 bar

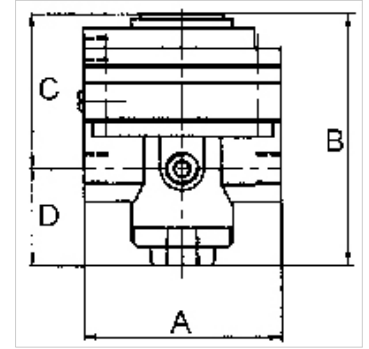

Norāde

Attention! A set of wearing parts cannot be supplied! These pressure regulators may only be opened in the factory! The given flow rates are based on the following parameters: 3000 l/min: P1: 5 bar, P2: 3 bar, $\Delta p \leq 0,1$ bar.

Citi dati pieejami pēc pieprasījuma.

Apraksts

With high flow rate and large secondary relief port. Pneumatically controlled diaphragm pressure regulators with large secondary relief port for applications requiring an extremely accurate working pressure, especially at high flow rates. We recommend our »multifix« series of pilot controllers.

Papildu informācija

1500 l/min: P1: 10 bar, P2: 7 bar, $\Delta p \leq 0.1$ bar.

Izstrādājums

Apzīmējums	Vītnes	Regulēšanas diapazons	A (mm)	B	C (mm)	D (mm)
K- 07 25 09 35	G 1/2	0.05 - 7 bar (max. 10 bar)	82,0	108,0 mm	64,5	43,5

Rezerves daļas

K-HALTERBAUSATZ STANDARD	Holder
K-KM MS	Hexagonal lock nuts, brass
K-SCHALLDAEPFER VYON	Vyon silencers
K-FILTERELEMENT	Filter element
K-XV AGM 2	Double nipples, parallel male thread