


# K-PRAEZIONSFILTERREGLER

Precision filter regulators

**HANSA FLEX**

## Īpašības

|                               |   |
|-------------------------------|---|
| ļeejas spiediens              | Max. 16 bar   |
| Vielas temperatūra            | max. 60 °C  |
| Vides temperatūra             | Max. 60 °C  |
| Darba vides                   | Micro-filtered, unoiled compressed air (0.01 µm)          |
| Manometra pieslēgums          | G 1/4   |
| Poru attālums filtra elementā | 10 µm   |
| Bīvēšanas materiāls           | NBR   |
| Korpuss                       | Die-cast zinc   |
| Iekšējā gaisa patēriņš        | 0.01 l/min, depending on input pressure and control range |

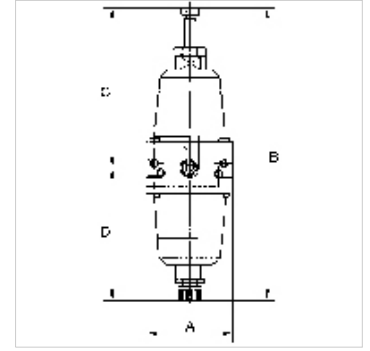

## Norāde

The given flow rates are based on the following parameters: 750 l/min: P1: 8 bar, P2: 2 bar,  $\Delta p \leq 0.2$  bar

750 l/min: P1: 8 bar, P2: 3 bar,  $\Delta p \leq 0.5$  bar

750 l/min: P1: 8 bar, P2: 5 bar,  $\Delta p \leq 0.7$  bar

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Diaphragm pressure regulators containing no non-ferrous metals, with selfrelieving design, combined with a centrifugal separator for applications requiring an extremely accurate working pressure.

## Papildu informācija

1500 l/min: P1: 10 bar, P2: 7 bar,  $\Delta p \leq 0.1$  bar.

## Izstrādājums

| Apzīmējums     | Vītnes | Regulēšanas diapazons | Caurplūde (L/min) | A (mm) | B        | C (mm) | D (mm) |
|----------------|--------|-----------------------|-------------------|--------|----------|--------|--------|
| K- 07 25 09 86 | G 1/4  | 0.1 - 2 bar           | 750               | 60,0   | 216,0 mm | 120,0  | 96,0   |
| K- 07 25 09 87 | G 1/4  | 0.1 - 3 bar           | 750               | 60,0   | 216,0 mm | 120,0  | 96,0   |
| K- 07 25 09 88 | G 1/4  | 0.2 - 5 bar           | 750               | 60,0   | 216,0 mm | 120,0  | 96,0   |

## Rezerves daļas

|                          |                      |
|--------------------------|----------------------|
| K-HALTERBAUSATZ STANDARD | Holder               |
| K-VERSCHLEI-SATZ         | Set of wearing parts |