


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Īpašības

ļeejas spiediens	Max. 30 bar
Vielas temperatūra	max. 130 °C
Vides temperatūra	Max. 60 °C
Caurplūde	2500 l/min
Poru attālums filtra elementā	50 µm
Blīvēšanas materiāls	FKM
Membrāna	PTFE on NBR base
Materiāls	stainless steel 1.4404 (AISI 316L)
Drain valve	Manual drain valve
Caurplūdes vērtības mērījums	At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar

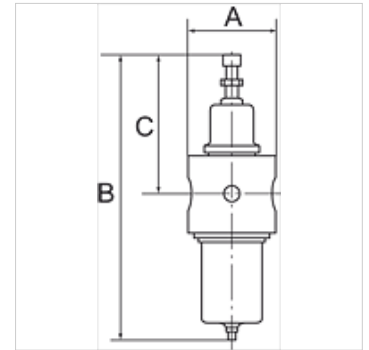

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Pasūtījuma norādes

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Izstrādājums

Apzīmējums	Vītnes	Regulēšanas diapazons	A (mm)	B	C (mm)
K- 07 25 06 52	G 1/4	1.0 - 15.0 bar	65,0	250,0 mm	125,0
K- 07 25 06 51	G 1/2	1.0 - 15.0 bar	80,0	260,0 mm	127,0

Rezerves daļas

K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts