


# K-WTEH 2-TLG PC SCHU MANO HANSA

Service units, 2-piece with polycarbonate bowl, bowl guard and pressure gauge

**HANSA FLEX**

## Īpašības

|                              |   |
|------------------------------|---|
| Ieejas spiediens             | 1.5 - 16 bar  |
| Izejas spiediens             | 0.5 - 8 bar   |
| Temperatūras diapazons       | -10 °C to +50 °C  |
| Darba vides                  | Saspiests gaiss   |
| Filtra smalkums              | 5,00 µm   |
| Pieslēguma vītne             | Material: Die-cast zinc   |
| Tvertne                      | Polycarbonate (with bayonet lock)                                 |
| Filtra elements              | Cellpor (PE)  |
| Korpuss                      | Material: Grivory® (PA 66)  |
| Membrāna                     | NBR   |
| Aizsarggrozs                 | Polyamide   |
| Pilienu aizsargs             | PA  |
| Iekšējā gaisa patēriņš       | Max. 1.5 l/min (depending on secondary pressure)                  |
| Caurplūdes vērtības mērījums | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

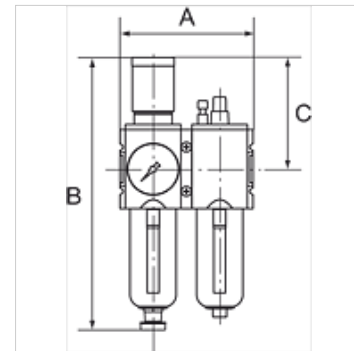

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

## Pasūtījuma norādes

The price does not include a key lock. Please order separately.

## Izstrādājums

| Apzīmējums     | Vītnes | Caurplūde (L/min) | A (mm) | B        | C (mm) | Kondensāta notece |
|----------------|--------|-------------------|--------|----------|--------|-------------------|
| K- 07 25 14 77 | G 1/4  | 1800              | 104,0  | 225,0 mm | 95,5   | Semi              |
| K- 07 25 14 78 | G 3/8  | 1800              | 104,0  | 225,0 mm | 95,5   | Semi              |
| K- 07 25 14 79 | G 3/8  | 3500              | 126,0  | 257,0 mm | 110,0  | Semi              |
| K- 07 25 14 80 | G 1/2  | 3500              | 126,0  | 257,0 mm | 110,0  | Semi              |
| K- 07 25 14 81 | G 3/4  | 12000             | 170,0  | 329,0 mm | 137,0  | Semi              |
| K- 07 25 14 82 | G 1    | 12000             | 170,0  | 329,0 mm | 137,0  | Semi              |
| K- 07 25 14 83 | G 1/4  | 1800              | 104,0  | 243,0 mm | 95,5   | Auto              |
| K- 07 25 14 84 | G 3/8  | 1800              | 104,0  | 243,0 mm | 95,5   | Auto              |
| K- 07 25 14 85 | G 3/8  | 3500              | 126,0  | 274,0 mm | 110,0  | Auto              |
| K- 07 25 14 86 | G 1/2  | 3500              | 126,0  | 274,0 mm | 110,0  | Auto              |
| K- 07 25 14 87 | G 3/4  | 12000             | 170,0  | 343,0 mm | 137,0  | Auto              |
| K- 07 25 14 88 | G 1    | 12000             | 170,0  | 343,0 mm | 137,0  | Auto              |

## Piederumi

K-STECKSCHLOSS Key lock

## Rezerves daļas

|                              |                               |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA        | Holder HANSA                  |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT              | Filter element                |
| K-TROPFAUFSATZ HANSA         | Drip attachment HANSA         |



Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.

30.06.2024

HANSA-FLEX AG

www.hansa-flex.com

1

# K-WTEH 2-TLG PC SCHU MANO HANSA

Service units, 2-piece with polycarbonate bowl, bowl guard and pressure gauge

**HANSA FLEX**

---