K-WTEH 3-TLG PC SCH MANO HANSA


Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Īpašības

Ieejas spiediens	1.5 - 16 bar
Izejas spiediens	0.5 - 8 bar
Temperatūras diapazons	-10 °C to +50 °C
Darba vides	Saspiests gaiss
Filtra smalkums	5,00 µm
Pieslēguma vītne	Material: Die-cast zinc
Tvertne	Polycarbonate (with bayonet lock)
Filtra elements	Cellpor (PE)
Korpuss	Material: Grivory® (PA 66)
Membrāna	NBR
Aizsarggrozs	Polyamide
Pilienu aizsargs	PA
Iekšējā gaisa patēriņš	Max. 1.5 l/min (depending on secondary pressure)
Caurplūdes vērtības mērījums	At P1 = 10 bar, P2 = 6.3 bar and pressure drop Δp = 1 bar



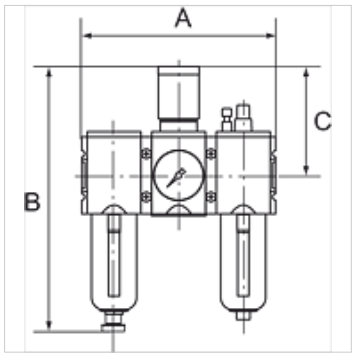

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Two or three-piece service units with excellent flow rates in modern design.
Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Pasūtījuma norādes

The price does not include a key lock. Please order separately.

Izstrādājums

Apzīmējums	Vītnes	Caurplūde (L/min)	A (mm)	B	C (mm)	Kondensāta notece
K- 07 25 14 37	G 1/4	1500	156,0	225,0 mm	95,5	Semi
K- 07 25 14 38	G 3/8	1500	156,0	225,0 mm	95,5	Semi
K- 07 25 14 39	G 3/8	3500	189,0	257,0 mm	110,0	Semi
K- 07 25 14 40	G 1/2	3500	189,0	257,0 mm	110,0	Semi
K- 07 25 14 41	G 3/4	12000	255,0	329,0 mm	137,0	Semi
K- 07 25 14 42	G 1	12000	255,0	329,0 mm	137,0	Semi
K- 07 25 14 43	G 1/4	1500	156,0	243,0 mm	95,5	Auto
K- 07 25 14 44	G 3/8	1500	156,0	243,0 mm	95,5	Auto
K- 07 25 14 45	G 3/8	3500	189,0	274,0 mm	110,0	Auto
K- 07 25 14 46	G 1/2	3500	189,0	274,0 mm	110,0	Auto
K- 07 25 14 47	G 3/4	12000	255,0	343,0 mm	137,0	Auto
K- 07 25 14 48	G 1	12000	255,0	343,0 mm	137,0	Auto

Piederumi

K-STECKSCHLOSS	Key lock

Rezerves daļas

K-HALTERBAUSATZ HANSA	Holder HANSA
K-ERSATZBEHAELTER HANSA POLY	Spare tank HANSA polycarbonat
K-FILTERELEMENT	Filter element
K-TROPFAUFSATZ HANSA	Drip attachment HANSA
K-SCHALTTAFELMUTTER HANSA	Nut HANSA
K-DICHTSATZ HANSA	Set of seals HANSA

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.