


# K-DRG DRVS MULTIFIX

Pressure regulators with pressure supply at both ends

**HANSA FLEX**

## Īpašības

|                              |  |
|------------------------------|--|
| ļeejas spiediens             | Max. 16 bar  |
| Vielas temperatūra           | max. 60 °C   |
| Vides temperatūra            | Max. 60 °C   |
| Bīvēšanas materiāls          | NBR  |
| Atsperes korpuss             | POM-brass  |
| Korpuss                      | Die-cast zinc  |
| Caurplūdes vērtības mērījums | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

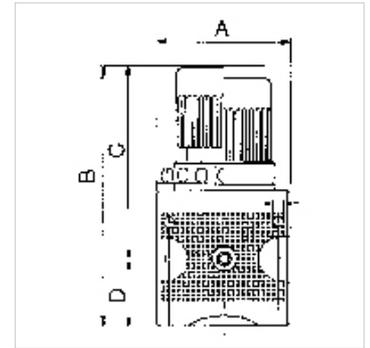

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down. <br>By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

## Pasūtījuma norādes

The port for the output pressure (P2) is on the rear! K-07250031: G 1/4, K-07250034: G 1/2. Lockable pressure regulators K-07250030 available on request.

## Izstrādājums

| Apzīmējums     | Vītnes | Regulēšanas diapazons | Caurplūde (L/min) | A (mm) | B        | C (mm) | D (mm) | DN | Tipizmērs |
|----------------|--------|-----------------------|-------------------|--------|----------|--------|--------|----|-----------|
| K- 07 25 00 31 | G 1/4  | 0.1 - 3 bar           | 2000              | 47,8   | 94,8 mm  | 67,0   | 27,8   | 6  | 1         |
| K- 07 25 00 32 | G 1/4  | 0.2 - 6 bar           | 2000              | 47,8   | 94,8 mm  | 67,0   | 27,8   | 6  | 1         |
| K- 07 25 00 30 | G 1/4  | 0.5 - 10 bar          | 2000              | 47,8   | 94,8 mm  | 67,0   | 27,8   | 6  | 1         |
| K- 07 25 00 34 | G 1/2  | 0.1 - 3 bar           | 5500              | 68,8   | 134,1 mm | 99,0   | 35,1   | 15 | 2         |
| K- 07 25 00 35 | G 1/2  | 0.2 - 6 bar           | 5500              | 68,8   | 134,1 mm | 99,0   | 35,1   | 15 | 2         |
| K- 07 25 00 33 | G 1/2  | 0.5 - 10 bar          | 5500              | 68,8   | 134,1 mm | 99,0   | 35,1   | 15 | 2         |

## Rezerves daļas

|                          |                      |
|--------------------------|----------------------|
| K-HALTERBAUSATZ          | Holder               |
| K-SCHALTTAFELMÜTTER      | Nut                  |
| K-HALTERBAUSATZ MULTIFIX | Holder               |
| K-KOPPELPAKET MEHR       | Coupling packet      |
| K-KOPPELPAKET SCHMA      | Coupling packet      |
| K-VERSCHLEI-SATZ         | Set of wearing parts |