


# K-FI REGL PC-BEHAEL MANO MULTIFIX

Filter regulators with polycarbonate bowl and pressure gauge

**HANSA FLEX**

## Īpašības

ļeejas spiediens	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Vielas temperatūra	max. 60 °C
Vides temperatūra	Max. 60 °C
Poru attālums filtra elementā	5 µm (C55: 40 µm)
Bļivēšanas materiāls	NBR
Atsperes korpus	POM-brass
Korpuss	Die-cast zinc, Aluminium for G 1 variant
Drain valve	Semi-automatic
Caurplūdes vērtības mērījums	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

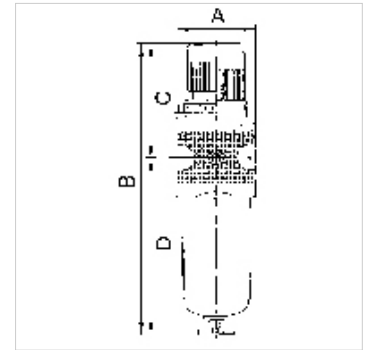

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

## Pasūtījuma norādes

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

## Izstrādājums

Apzīmējums	Vītnes	Regulēšanas diapazons	Caurplūde (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Tipizmers
K- 07 25 00 70	G 1/4	0.1 - 3 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 19 40	G 1/4	0.2 - 6 bar	1500	47,8	192,1 mm	67,0	125,1	6	-
K- 07 25 00 69	G 1/4	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 19 39	G 1/4	0.5 - 16 bar	1500	47,8	192,1 mm	67,0	125,1	6	-
K- 07 25 00 74	G 3/8	0.1 - 3 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 19 42	G 3/8	0.2 - 6 bar	1500	47,8	192,1 mm	67,0	125,1	10	-
K- 07 25 00 73	G 3/8	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 19 41	G 3/8	0.5 - 16 bar	1500	47,8	192,1 mm	67,0	125,1	10	-
K- 07 25 00 78	G 1/2	0.1 - 3 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 19 44	G 1/2	0.2 - 6 bar	3500	68,8	246,3 mm	99,0	147,3	15	-
K- 07 25 00 77	G 1/2	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 19 43	G 1/2	0.5 - 16 bar	3500	68,8	246,3 mm	99,0	147,3	15	-
K- 07 25 00 82	G 3/4	0.1 - 3 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 19 46	G 3/4	0.2 - 6 bar	3500	68,8	246,3 mm	99,0	147,3	20	-
K- 07 25 00 81	G 3/4	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 19 45	G 3/4	0.5 - 16 bar	3500	68,8	246,3 mm	99,0	147,3	20	-
K- 07 25 00 86	G 1	0.1 - 3 bar	12000	100,0	381,8 mm	128,0	253,8	25	3
K- 07 25 19 48	G 1	0.2 - 6 bar	12000	100,0	381,8 mm	128,0	253,8	25	-
K- 07 25 00 85	G 1	0.5 - 10 bar	12000	100,0	381,8 mm	128,0	253,8	25	3
K- 07 25 19 47	G 1	0.5 - 16 bar	12000	100,0	381,8 mm	128,0	253,8	25	-

## Rezerves daļas

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage



Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.

25.04.2025

HANSA-FLEX AG

www.hansa-flex.com

1

# K-FI REGL PC-BEHAEL MANO MULTIFIX

Filter regulators with polycarbonate bowl and pressure gauge

**HANSA FLEX**