


K-FI REGL PC-BEHÄEL S MANO MULTIFIX

Filter regulators with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Īpašības

Ieejas spiediens	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Vielas temperatūra	max. 60 °C
Vides temperatūra	Max. 60 °C
Poru attālums filtra elementā	5 µm (C55: 40 µm)
Blīvēšanas materiāls	NBR
Atsperes korpus	POM-brass
Korpuss	Die-cast zinc, Aluminium for G 1 variant
Drain valve	Semi-automatic
Caurplūdes vērtības mērījums	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

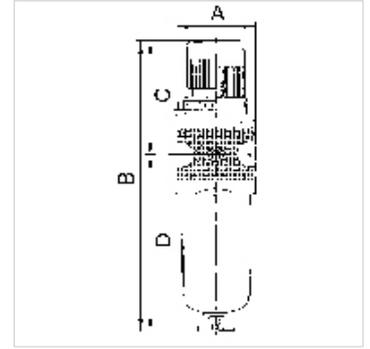

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

Pasūtījuma norādes

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

Izstrādājums

Apzīmējums	Vītne	Regulēšanas diapazons	Caurplūde (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Tipizmers
K- 07 25 00 67	G 1/4	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 00 71	G 3/8	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 00 75	G 1/2	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 00 79	G 3/4	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 00 83	G 1	0.5 - 10 bar	12000	100,0	381,8 mm	128,0	253,8	25	3

Rezerves daļas

K-HALTERBAUSATZ	Holder
K-SCHALTAFELMÜTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHÄELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHÄELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-VERSCHLEI-SATZ	Set of wearing parts
K-FILTERELEMENT	Filter element
K-AUTOMAT ABLASSVENTIL	Automatic drain valve