


K-FI REGL METALLBEHAE S MANO MULTIF

Filter regulators with metal bowl and sight glass, incl. pressure gauge

HANSA FLEX

Īpašības

| | |
|-------------------------------|--|
| ļeejas spiediens | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Vielas temperatūra | max. 60 °C |
| Vides temperatūra | Max. 60 °C |
| Poru attālums filtra elementā | 5 µm (C55: 40 µm) |
| Blīvēšanas materiāls | NBR |
| Atsperes korpus | POM-brass |
| Korpuss | Die-cast zinc, Aluminium for G 1 variant |
| Drain valve | Semi-automatic |
| Caurplūdes vērtības mērījums | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

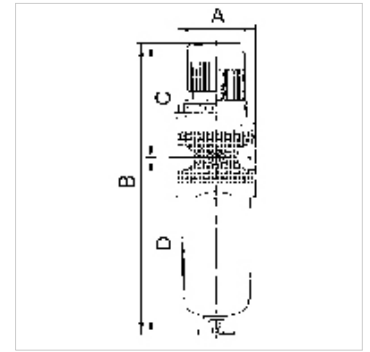

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

Pasūtījuma norādes

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

Izstrādājums

| Apzīmējums | Vītnes | Regulēšanas diapazons | Caurplūde (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Tipizmers |
|----------------|--------|-----------------------|-------------------|--------|----------|--------|--------|----|-----------|
| K- 07 25 00 68 | G 1/4 | 0.5 - 10 bar | 1500 | 47,8 | 192,0 mm | 67,0 | 125,5 | 6 | 1 |
| K- 07 25 00 72 | G 3/8 | 0.5 - 10 bar | 1500 | 47,8 | 192,0 mm | 67,0 | 125,5 | 10 | 1 |
| K- 07 25 00 76 | G 1/2 | 0.5 - 10 bar | 3500 | 68,8 | 246,0 mm | 99,0 | 149,2 | 15 | 2 |
| K- 07 25 00 80 | G 3/4 | 0.5 - 10 bar | 3500 | 68,8 | 246,0 mm | 99,0 | 149,2 | 20 | 2 |
| K- 07 25 00 84 | G 1 | 0.5 - 10 bar | 12000 | 100,0 | 385,0 mm | 128,0 | 255,7 | 25 | 3 |

Rezerves daļas

| | |
|----------------------------------|---------------------------|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTTAFELMÜTTER | Nut |
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-SCHUTZKORB G | Protective cage |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-FILTERELEMENT | Filter element |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |