


# K-FI PC-BEHAEL H ABLV MULTIFX MINI

Filters with polycarbonate bowl and semi-automatic drain valve

**HANSA FLEX**

## Īpašības

<b>Ieejas spiediens</b>	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
<b>Vielas temperatūra</b>	max. 60 °C
<b>Vides temperatūra</b>	Max. 60 °C
<b>Caurplūde</b>	1000 l/min
<b>Poru attālums filtra elementā</b>	5 µm
<b>Korpuss</b>	Die-cast zinc
<b>Drain valve</b>	Semi-automatic
<b>Caurplūdes vērtības mērījums</b>	At P2 = 6 bar and pressure drop $\Delta p = 1$ bar

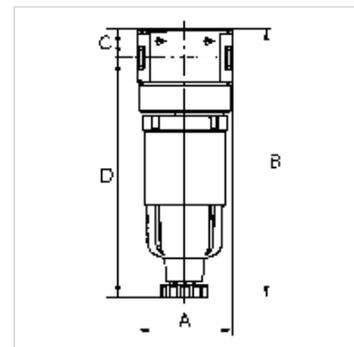

## Norāde

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Centrifugal separators with a sintered filter element.

## Izstrādājums

Apzīmējums	Vītnes	A (mm)	B	C (mm)	D (mm)	DN	Tipizmērs
K- 07 25 00 42	G 1/8	40,0	114,8 mm	12,3	102,5	5	0
K- 07 25 00 44	G 1/4	40,0	114,8 mm	12,3	102,5	5	0

## Rezerves daļas

<b>K-AUTOMAT ABLASSVENTIL</b>	Automatic drain valve
<b>K-KOPPELPAKET MEHR</b>	Coupling packet
<b>K-ERSATZBEHAELTER MULTI MINI</b>	Spare tank »multifix-mini« & »standard-mini«
<b>K-PC-BEHAELTER FILTER MULTIFIX</b>	Polycarbonate tank filter
<b>K-FILTERELEMENT</b>	Filter element