


K-FI METALLBEHAEL H ALV MULTIFIX MI

Filters with metal bowl and semi-automatic drain valve

HANSA FLEX

Īpašības

| | |
|--------------------------------------|--|
| Ieejas spiediens | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Vielas temperatūra | max. 60 °C |
| Vides temperatūra | Max. 60 °C |
| Caurplūde | 1000 l/min |
| Poru attālums filtra elementā | 5 µm |
| Korpuss | Die-cast zinc |
| Drain valve | Semi-automatic |
| Caurplūdes vērtības mērījums | At P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

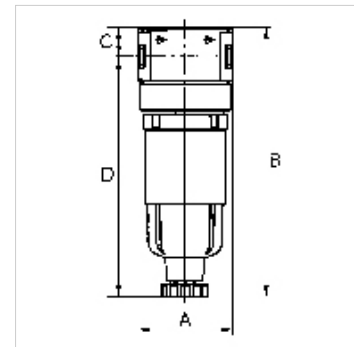

Norāde

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

Citi dati pieejami pēc pieprasījuma.

Apraksts

Centrifugal separators with a sintered filter element.

Izstrādājums

| Apzīmējums | Vītnes | A (mm) | B | C (mm) | D (mm) | DN | Tipizmērs |
|----------------|--------|-----------|----------|-----------|-----------|----|-----------|
| K- 07 25 00 43 | G 1/8 | 40,0 | 111,6 mm | 12,3 | 99,3 | 5 | 0 |
| K- 07 25 00 45 | G 1/4 | 40,0 | 111,6 mm | 12,3 | 99,3 | 5 | 0 |

Rezerves daļas

| | |
|---------------------------------------|--|
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-ERSATZBEHAELTER MULTI MINI | Spare tank »multifix-mini« & »standard-mini« |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-FILTERELEMENT | Filter element |