


K-WTEH 2-TLG MET M ABLV TRO STANDARD

Service units with metal bowl and manual drain valve, metal sight dome

HANSA FLEX

Īpašības

| | |
|--------------------------------------|--|
| Ieejas spiediens | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl) |
| Regulēšanas diapazons | 0.5 to 10 bar (polycarbonate bowl / bowl guard) 0.5 to 16 bar (metal bowl) |
| Vielas temperatūra | max. 60 °C |
| Vides temperatūra | Max. 60 °C |
| Poru attālums filtra elementā | 5 µm (Size 1 / Size 3), 40 µm (Size 2 / Size 4) |
| Blīvēšanas materiāls | NBR |
| Korpuss | Die-cast zinc / Aluminium, painted silver |
| Pilienu aizsargs | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| Caurplūdes vērtības mērījums | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

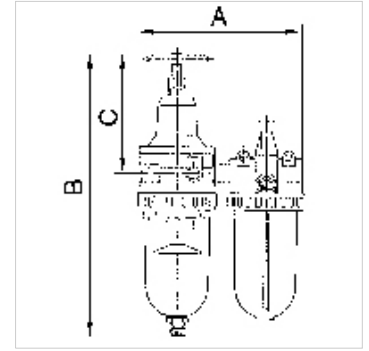

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Two-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

Izstrādājums

| Apzīmējums | Vītnes | Caurplūde (L/min) | A (mm) | B | C (mm) | DN | Ø manometram |
|----------------|--------|-------------------|--------|----------|--------|----|--------------|
| K- 07 25 14 94 | G 1/4 | 600 | 117,0 | 240,0 mm | 106,5 | 6 | 50 |
| K- 07 25 14 97 | G 3/8 | 600 | 117,0 | 240,0 mm | 106,5 | 6 | 50 |
| K- 07 25 15 00 | G 3/8 | 800 | 150,0 | 281,5 mm | 120,5 | 10 | 63 |
| K- 07 25 15 03 | G 1/2 | 2100 | 175,0 | 302,0 mm | 130,0 | 15 | 63 |
| K- 07 25 15 06 | G 3/4 | 4000 | 220,0 | 454,6 mm | 190,6 | 20 | 63 |
| K- 07 25 15 09 | G 1 | 4000 | 220,0 | 454,6 mm | 190,6 | 25 | 63 |

Rezerves daļas

| | |
|----------------------------|---|
| K-HALTERBAUSATZ STANDARD | Holder |
| K-SCHUTZKORB G | Protective cage |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUFSATZ POLYCARBO | Drip attachment polycarbonate |
| K-XV AGM MS NI | Double nipples, parallel male thread, nickel-plated brass |
| K-RD NIPPEL MS NI | Reducing nipples - nickel-plated brass |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples |
| K-TROPFAUFSATZ METALL | Drip attachment metal |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |