


K-DRG VORDRUCK STANDARD-MINI

Pressure regulators

HANSA FLEX

Īpašības

| | |
|------------------------------|---|
| ļeejas spiediens | Max. 25 bar |
| Vielas temperatūra | max. 60 °C |
| Vides temperatūra | Max. 60 °C |
| Bīvēšanas materiāls | NBR |
| Atspēres korpuss | POM-brass |
| Korpuss | Die-cast zinc, painted silver |
| Caurplūdes vērtības mērījums | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Papildu dati | User manual on request |

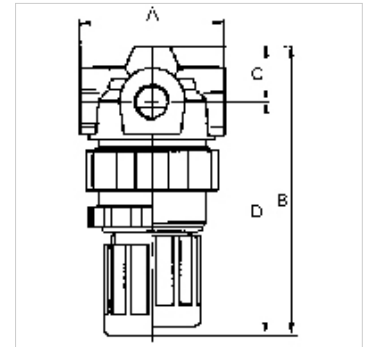

Apraksts

Compact, reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design. The pressure setting can be locked by pushing the knob down.

Izstrādājums

| Apzīmējums | Vītnes | Regulēšanas diapazons | Caurplūde (L/min) | A (mm) | B | C (mm) | D (mm) | DN |
|----------------|--------|-----------------------|----------------------|-----------|---------|-----------|-----------|----|
| K- 07 25 03 28 | G 1/8 | 0.1 - 3 bar | 330 | 40,0 | 76,3 mm | 15,0 | 61,3 | 5 |
| K- 07 25 03 29 | G 1/8 | 0.5 - 6 bar | 330 | 40,0 | 76,3 mm | 15,0 | 61,3 | 5 |
| K- 07 25 03 30 | G 1/8 | 0.5 - 10 bar | 330 | 40,0 | 76,3 mm | 15,0 | 61,3 | 5 |
| K- 07 25 03 31 | G 1/8 | 0.5 - 16 bar | 330 | 40,0 | 76,3 mm | 15,0 | 61,3 | 5 |
| K- 07 25 03 32 | G 1/4 | 0.1 - 3 bar | 330 | 40,0 | 76,3 mm | 15,0 | 61,3 | 5 |
| K- 07 25 03 33 | G 1/4 | 0.5 - 6 bar | 330 | 40,0 | 76,3 mm | 15,0 | 61,3 | 5 |
| K- 07 25 03 34 | G 1/4 | 0.5 - 10 bar | 330 | 40,0 | 76,3 mm | 15,0 | 61,3 | 5 |
| K- 07 25 03 35 | G 1/4 | 0.5 - 16 bar | 330 | 40,0 | 76,3 mm | 15,0 | 61,3 | 5 |

Rezerves daļas

| | |
|----------------------------|---|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTTAFELMUTTER | Nut |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples |
| K-XV AGM MS NI | Double nipples, parallel male thread, nickel-plated brass |
| K-VERSCHLEI-SATZ | Set of wearing parts |