


# K-DRG VORDRUCK STANDARD-MINI

Pressure regulators

**HANSA FLEX**

## Īpašības

|                              |   |
|------------------------------|---|
| ļeejas spiediens             | Max. 25 bar   |
| Vielas temperatūra           | max. 60 °C  |
| Vides temperatūra            | Max. 60 °C  |
| Bīvēšanas materiāls          | NBR   |
| Atspēres korpuss             | POM-brass   |
| Korpuss                      | Die-cast zinc, painted silver                                     |
| Caurplūdes vērtības mērījums | At P1 = 8 bar, P2 = 6 bar and pressure drop<br>$\Delta p = 1$ bar |
| Papildu dati                 | User manual on request  |

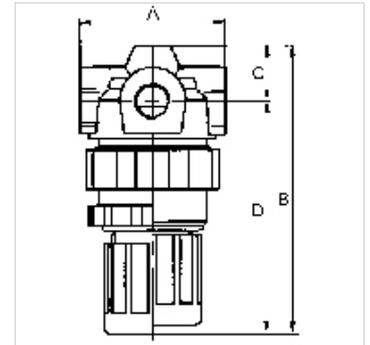

## Apraksts

Compact, reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design. The pressure setting can be locked by pushing the knob down.

## Izstrādājums

| Apzīmējums     | Vītnes | Regulēšanas diapazons | Caurplūde<br>(L/min) | A<br>(mm) | B       | C<br>(mm) | D<br>(mm) | DN |
|----------------|--------|-----------------------|----------------------|-----------|---------|-----------|-----------|----|
| K- 07 25 03 28 | G 1/8  | 0.1 - 3 bar           | 330                  | 40,0      | 76,3 mm | 15,0      | 61,3      | 5  |
| K- 07 25 03 29 | G 1/8  | 0.5 - 6 bar           | 330                  | 40,0      | 76,3 mm | 15,0      | 61,3      | 5  |
| K- 07 25 03 30 | G 1/8  | 0.5 - 10 bar          | 330                  | 40,0      | 76,3 mm | 15,0      | 61,3      | 5  |
| K- 07 25 03 31 | G 1/8  | 0.5 - 16 bar          | 330                  | 40,0      | 76,3 mm | 15,0      | 61,3      | 5  |
| K- 07 25 03 32 | G 1/4  | 0.1 - 3 bar           | 330                  | 40,0      | 76,3 mm | 15,0      | 61,3      | 5  |
| K- 07 25 03 33 | G 1/4  | 0.5 - 6 bar           | 330                  | 40,0      | 76,3 mm | 15,0      | 61,3      | 5  |
| K- 07 25 03 34 | G 1/4  | 0.5 - 10 bar          | 330                  | 40,0      | 76,3 mm | 15,0      | 61,3      | 5  |
| K- 07 25 03 35 | G 1/4  | 0.5 - 16 bar          | 330                  | 40,0      | 76,3 mm | 15,0      | 61,3      | 5  |

## Rezerves daļas

|                            |   |
|----------------------------|---|
| K-HALTERBAUSATZ            | Holder  |
| K-SCHALTTAFELMUTTER        | Nut   |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples  |
| K-XV AGM MS NI             | Double nipples, parallel<br>male thread, nickel-plated<br>brass |
| K-VERSCHLEI-SATZ           | Set of wearing parts  |