


K-DRG TRINKWASSER DVGW

Pressure regulators for drinking water, DVGW approved



Īpašības

Ieejas spiediens	Max. 25 bar
Darba vides	Drinking water, nitrogen, compressed air, non-aggressive liquids
Eksploatācijas temperatūra	Max. 40 °C (transparent strainer cup), Max. 70 °C (brass strainer cup)
Bīvēšanas materiāls	NBR
Atspēres korpuss	Plastic
Korpuss	Brass
Sietītis	Plastic or brass
Papildu dati	DVGW Certificate (only for K-07250457 - K-07250462)

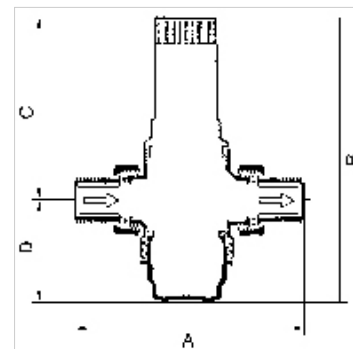

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Diaphragm pressure regulators with pressure-reduced single-seated valve and built-in strainer. These pressure regulators, which are independent of inlet pressure, protect domestic water installations against excessive supply pressure. They can also be used for commercial or industrial purposes providing their specification is adequate.

Izstrādājums

Apzīmējums	Vītne	Regulēšanas diapazons	Caurplūdes plūsmas koeficients (m ³ /h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 57	R 1/2	1.5 - 6 bar	2,4	140,0	147,0 mm	89,0	58,0
K- 07 25 04 58	R 3/4	1.5 - 6 bar	3,1	160,0	147,0 mm	89,0	58,0
K- 07 25 04 59	R 1	1.5 - 6 bar	7,6	180,0	175,0 mm	111,0	64,0
K- 07 25 04 60	R 1 1/4	1.5 - 6 bar	9,1	200,0	175,0 mm	111,0	64,0
K- 07 25 04 61	R 1 1/2	1.5 - 6 bar	12,6	225,0	299,0 mm	173,0	126,0
K- 07 25 04 62	R 2	1.5 - 6 bar	12,0	255,0	299,0 mm	173,0	126,0
K- 07 25 04 63	R 1/2	1.5 - 12 bar	2,4	140,0	152,0 mm	96,0	56,0
K- 07 25 04 64	R 3/4	1.5 - 12 bar	3,1	160,0	152,0 mm	96,0	56,0
K- 07 25 04 65	R 1	1.5 - 12 bar	7,6	180,0	217,0 mm	140,0	77,0
K- 07 25 04 66	R 1 1/4	1.5 - 12 bar	9,1	200,0	217,0 mm	140,0	77,0
K- 07 25 04 67	R 1 1/2	1.5 - 12 bar	12,6	225,0	285,0 mm	172,0	113,0
K- 07 25 04 68	R 2	1.5 - 12 bar	12,0	255,0	285,0 mm	172,0	113,0
K- 07 25 04 69	R 1/2	0.5 - 2 bar	2,4	140,0	204,0 mm	148,0	56,0
K- 07 25 04 70	R 3/4	0.5 - 2 bar	3,1	160,0	204,0 mm	148,0	56,0
K- 07 25 04 71	R 1	0.5 - 2 bar	7,6	180,0	262,0 mm	185,0	77,0

Rezerves daļas

K-VENTILAUSTAUCHSATZ	Valve replacement kit
K-ERSATZSIEBE	Replacement strainer
K-DOPPELRINGSCHLUESSEL	Double ring spanner
K-VERSCHLEI-SATZ DRCKREGLER	Wearing part set consisting of: 2x cap nuts, 2x screw fittings, 2x sealing rings