


K-FI RUECKSPUEL M DRUCKREGLER

Back-flushing filters with pressure regulator

HANSA FLEX

Īpašības

ļeejas spiediens	Max. 16 bar
Vides temperatūra	+5 °C to +40 °C
Ūdens temperatūra min.	5 °C
Ūdens temperatūra max.	30 °C
Poru attālums filtra elementā	90 µm (first filter element), 110 µm (second filter element)
Korpuss	Brass
Sietīņš	Impact-resistant plastic
Caurplūdes jauda	at $\Delta p = 0.2$ bar
Papildu dati	DVGW Zertifikat

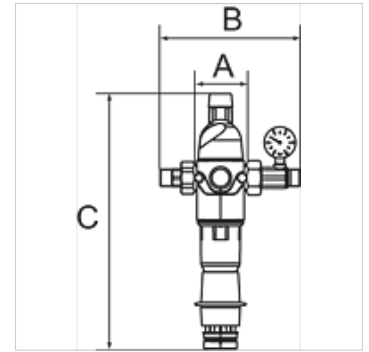

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Combined station for filtering and regulating the pressure of drinking and domestic water in addition to well, process and cooling water for once-through cooling systems, consisting of a diaphragm pressure regulator with a pressure-reduced single-seated valve and a back-flushing filter. The filter candle must be cleaned manually at regular intervals by back-flushing (flushing out dirt particles). Integrated back-flushing element with suction elements, back-flushing lever, wing lever for back-flushing element, hose connection for flushing water.

Izstrādājums

Apzīmējums	Vītne	DN	Regulēšanas diapazons	Caurplūdes plūsmas koeficients (m ³ /h)	A (mm)	B	C (mm)
K- 07 25 10 11	R 3/4	20	2 - 6 bar	3,0	79,7	213,0 mm	392,8
K- 07 25 10 12	R 1	25	2 - 6 bar	3,5	79,7	213,0 mm	392,8
K- 07 25 10 13	R 1 1/4	32	2 - 6 bar	4,0	79,7	213,0 mm	392,8

Rezerves daļas

K-FILTEREINSATZ	Filter insert
K-KUNSTSTOFFBEHAELTER	Plastic tank