


K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

Īpašības

Darba vides	Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Darba spiediens	Max. 10 bar
Sākuma spiediens	0,4 bar (Ø 32 und Ø 40), 0,3 bar (Ø 50)
Temperatūras diapazons	-10 °C to +80 °C
Uzstādīšana	Screwed joint between stainless steel barrel and heads
Virzūjkāts	C45 steel, hard chrome-plated
Caurule	Anodised aluminium
Virzulis	Technopolymer
Bļivēšanas materiāls	NBR

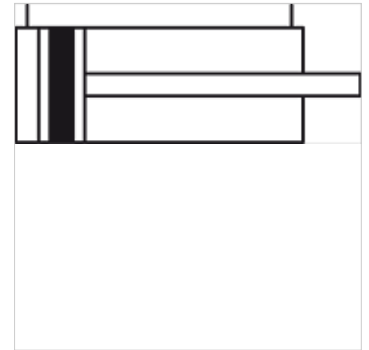

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Version with magnetic piston

Pasūtījuma norādes

Note: 500 mm is the maximum stroke available for the double-acting type.

Papildu informācija

Important: The scope of supply does not include a connector. Please order separately.

Note: 500 mm is the maximum stroke available for the double-acting type.

Izstrādājums

Apzīmējums	Ø virzulim	Gājiens (mm)	Savienojums	Virzūjkāta vītne
K- 07 15 17 29	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 17 30	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 17 31	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 17 32	32 mm	100	G 1/8	M 10 x 1.25
K- 07 15 17 33	32 mm	125	G 1/8	M 10 x 1.25
K- 07 15 17 34	32 mm	160	G 1/8	M 10 x 1.25
K- 07 15 17 35	32 mm	200	G 1/8	M 10 x 1.25
K- 07 15 17 36	32 mm	250	G 1/8	M 10 x 1.25
K- 07 15 17 37	32 mm	320	G 1/8	M 10 x 1.25
K- 07 15 17 38	32 mm	400	G 1/8	M 10 x 1.25
K- 07 15 17 39	32 mm	500	G 1/8	M 10 x 1.25
K- 07 15 17 40	40 mm	25	G 1/4	M 12 x 1.25
K- 07 15 17 41	40 mm	50	G 1/4	M 12 x 1.25
K- 07 15 17 42	40 mm	80	G 1/4	M 12 x 1.25
K- 07 15 17 43	40 mm	100	G 1/4	M 12 x 1.25
K- 07 15 17 44	40 mm	125	G 1/4	M 12 x 1.25
K- 07 15 17 45	40 mm	160	G 1/4	M 12 x 1.25
K- 07 15 17 46	40 mm	200	G 1/4	M 12 x 1.25
K- 07 15 17 47	40 mm	250	G 1/4	M 12 x 1.25
K- 07 15 17 48	40 mm	320	G 1/4	M 12 x 1.25
K- 07 15 17 49	40 mm	400	G 1/4	M 12 x 1.25
K- 07 15 17 50	40 mm	500	G 1/4	M 12 x 1.25
K- 07 15 17 51	50 mm	25	G 1/4	M 16 x 1.5
K- 07 15 17 52	50 mm	50	G 1/4	M 16 x 1.5
K- 07 15 17 53	50 mm	80	G 1/4	M 16 x 1.5
K- 07 15 17 54	50 mm	100	G 1/4	M 16 x 1.5
K- 07 15 17 55	50 mm	125	G 1/4	M 16 x 1.5
K- 07 15 17 56	50 mm	160	G 1/4	M 16 x 1.5
K- 07 15 17 57	50 mm	200	G 1/4	M 16 x 1.5
K- 07 15 17 58	50 mm	250	G 1/4	M 16 x 1.5



Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.

10.03.2025

HANSA-FLEX AG

www.hansa-flex.com

1

K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

Izstrādājums

Apzīmējums	Ø virzulim	Gājiens (mm)	Savienojums	Virzuļkāta vītne
K- 07 15 17 59	50 mm	320	G 1/4	M 16 x 1.5
K- 07 15 17 60	50 mm	400	G 1/4	M 16 x 1.5
K- 07 15 17 61	50 mm	500	G 1/4	M 16 x 1.5

Piederumi

K-FUSSBEFESTIGUNG 2	Foot model
K-KOPFMÜTTER DECKEL BODEN	Hexagon nut (for head)
K-GABELKOEPFEN 4	Fork model
K-GELENKAUGEN 5	Rod eye model
K-SCHWENKLAGER 2	Counter-hinge model
K-SENSORHALTER	Sensor support (with T-slot adapter)
K-SENSOREN T-NUT 1	Sensor for T-slot