
K-FI MIKRO M DIFFERENZ MANO

Micro-filters with differential pressure gauge

Īpašības

Ieejas spiediens	Min. 4 bar, Max. 16 bar
Diferenciālā spiediena manometra indikāciju diapazons	0 - 2 bar
Korpuss, filtra tvertne	Aluminium
Vides temperatūra	+5 °C to +60 °C
Filtra smalkums	0,01 µm
Iedarbības pakāpe	99.9999 %
Filtra ieliktnis	Borosilicate (with glass-fibre and foam plastic)
Caurplūdes vērtības mērījums	At P1 = 6 bar and pressure drop Δp = 1.5%



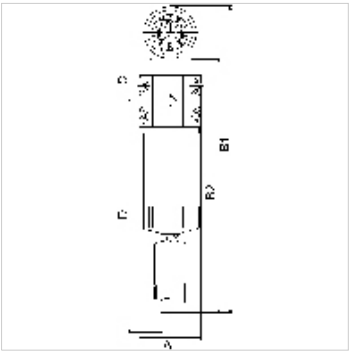

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Suitable for all applications where the standard centrifugal separators do not afford the desired efficiency. The pre-filters and micro-filters are equipped with an automatic drain valve. All devices can be supplied with or without a differential pressure gauge. The differential pressure gauge indicates the degree of contamination of the filter element as a function of the pressure drop.

Izstrādājums

Apzīmējums	Vītnes	Caurplūde (L/min)	A (mm)	B1 (mm)	B2 (mm)	C (mm)	D (mm)
K- 07 25 13 02	G 1/4	1300	82,5	407,0	335,0	57,0	353,0
K- 07 25 13 03	G 3/8	1300	82,5	407,0	335,0	57,0	353,0
K- 07 25 13 04	G 1/2	1300	82,5	407,0	335,0	57,0	353,0
K- 07 25 13 05	G 3/4	2000	82,5	477,0	405,0	57,0	493,0
K- 07 25 13 06	G 1	4080	118,0	492,0	420,0	72,0	458,0
K- 07 25 13 07	G 1 1/4	4580	118,0	592,0	520,0	72,0	658,0
K- 07 25 13 08	G 1 1/2	6500	118,0	692,0	620,0	72,0	858,0
K- 07 25 13 09	G 2	9000	118,0	882,0	810,0	72,0	1238,0

Rezerves daļas

K-FILTERELEMENT SONDER	Filter element
K-VERBINDUNGELEMENTE SOND	Connecting sets
K-HALTERBAUSATZ	Holder
K-DIFFERENZDRUCKMANOMETER	Differential pressure gauge
K-AUTOMAT ABLASSVENTIL	Automatic drain valve

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.