

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

Īpašības

Temperatūras diapazons -20 °C to +60 °C

Spiediens Max. 12 bar



Spiediena diapazons Max. 12 bar

Temperatūra -20 °C to +60 °C

Caurplūde 0 - 400 l/min

Atspere Stainless-steel

Korpuss Brass

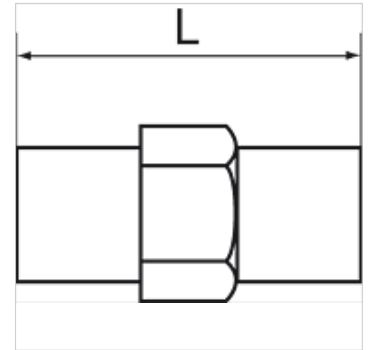

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Izstrādājums

Apzīmējums	Vītnes	Priekšiestatītais darba spiediens	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0