



# K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

**HANSA FLEX**

## Īpašības

Temperatūras diapazons	-20 °C to +60 °C
Spiediens	Max. 12 bar
Spiediena diapazons	Max. 12 bar
Temperatūra	-20 °C to +60 °C
Caurplūde	0 - 400 l/min
Atspere	Stainless-steel
Korpuss	Brass

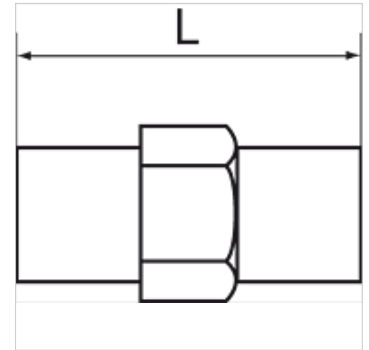

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

## Izstrādājums

Apzīmējums	Vītnes	Priekšiestatītais darba spiediens	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0