


# K-WTST SAFETY BKR SCHA AN FILR MULT

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and filter regulator with lock cylinder

**HANSA FLEX**

## Īpašības

|  |  |
|--|--|
| Ieejas spiediens                       | 2 - 16 bar   |
| Izejas spiediens                       | 0.5 - 10 bar   |
| Temperatūras diapazons                 | Max. 60 °C   |
| Darba vides                            | Saspiests gaiss  |
| Blīvēšanas materiāls                   | NBR  |
| Tvertne                                | Polycarbonate (with bayonet lock) and bowl guard               |
| Atsperes korpuss                       | POM  |
| Filtra elements                        | Cellpor (PE) 5 µm  |
| Korpuss                                | Die-cast zinc  |
| Membrāna                               | NBR  |
| Drain valve                            | Semi-automatic   |
| Caurplūdes vērtības mērījums           | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Papildu dati                           | see data sheets of the individual components (on request)      |
| Atgaisošanas pieslēgums Lodveida krāns | Silencer   |

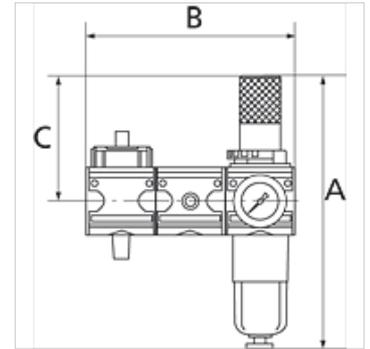

## Apraksts

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Pasūtījuma norādes

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

## Izstrādājums

| Apzīmējums     | Vītnes | Caurplūde (L/min) | A (mm) | B        | C (mm) | Kondensāta notece |
|----------------|--------|-------------------|--------|----------|--------|-------------------|
| K- 07 25 15 14 | G 1/4  | 1000              | 219,1  | 137,8 mm | 94,0   | Semi-automatic    |
| K- 07 25 15 15 | G 1/2  | 4000              | 269,3  | 200,8 mm | 122,0  | Semi-automatic    |
| K- 07 25 15 16 | G 1    | 12000             | 410,8  | 282,8 mm | 157,0  | Semi-automatic    |