K-KURZH ZYL DOPPELW IG ASQ


Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA FLEX

Īpašības

Darba vides	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Darba spiediens	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
Temperatūras diapazons	-20 °C to +80 °C
Virzuļkāts	Hardened steel, thick-chromed
Virzulis	Brass (12 to 16 mm); Aluminium (20 to 100 mm)
Blīvēšanas materiāls	NBR
Cilindra caurule	Aluminium



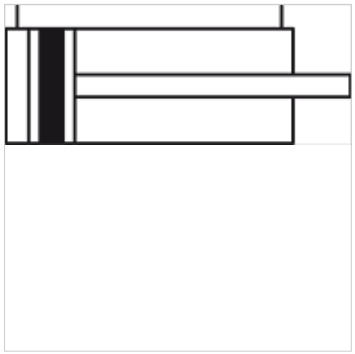

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100

Papildu informācija

Important: The scope of supply does not include a connector. Please order separately.
Other piston-Ø and stroke versions available on request.

Izstrādājums

Apzīmējums	Ø virzulim	Gājiens (mm)	Konstrukcija	Ø virzuļkātam (mm)	Virzuļkāta iekšējā vītne
K- 07 15 12 15	12 mm	5	1	6	M 3 x 0.5
K- 07 15 12 16	12 mm	10	1	6	M 3 x 0.5
K- 07 15 12 17	12 mm	20	1	6	M 3 x 0.5
K- 07 15 12 18	12 mm	25	1	6	M 3 x 0.5
K- 07 15 12 19	12 mm	30	1	6	M 3 x 0.5
K- 07 15 12 20	12 mm	35	1	6	M 3 x 0.5
K- 07 15 12 21	12 mm	40	1	6	M 3 x 0.5
K- 07 15 12 22	12 mm	45	1	6	M 3 x 0.5
K- 07 15 12 23	12 mm	50	1	6	M 3 x 0.5
K- 07 15 12 24	16 mm	5	1	8	M 4 x 0.7
K- 07 15 12 25	16 mm	10	1	8	M 4 x 0.7
K- 07 15 12 26	16 mm	20	1	8	M 4 x 0.7
K- 07 15 12 27	16 mm	25	1	8	M 4 x 0.7
K- 07 15 12 28	16 mm	30	1	8	M 4 x 0.7
K- 07 15 12 29	16 mm	35	1	8	M 4 x 0.7
K- 07 15 12 30	16 mm	40	1	8	M 4 x 0.7
K- 07 15 12 31	16 mm	45	1	8	M 4 x 0.7
K- 07 15 12 32	16 mm	50	1	8	M 4 x 0.7
K- 07 15 12 33	16 mm	55	1	8	M 4 x 0.7
K- 07 15 12 34	16 mm	60	1	8	M 4 x 0.7
K- 07 15 12 35	20 mm	5	2	10	M 5 x 0.8
K- 07 15 12 36	20 mm	10	2	10	M 5 x 0.8
K- 07 15 12 37	20 mm	20	2	10	M 5 x 0.8
K- 07 15 12 38	20 mm	25	2	10	M 5 x 0.8
K- 07 15 12 39	20 mm	30	2	10	M 5 x 0.8
K- 07 15 12 40	20 mm	35	2	10	M 5 x 0.8
K- 07 15 12 41	20 mm	40	2	10	M 5 x 0.8
K- 07 15 12 42	20 mm	45	2	10	M 5 x 0.8
K- 07 15 12 43	20 mm	50	2	10	M 5 x 0.8
K- 07 15 12 44	20 mm	55	2	10	M 5 x 0.8
K- 07 15 12 45	20 mm	60	2	10	M 5 x 0.8
K- 07 15 12 46	20 mm	70	2	10	M 5 x 0.8
K- 07 15 12 47	20 mm	75	2	10	M 5 x 0.8
K- 07 15 12 48	20 mm	80	2	10	M 5 x 0.8
K- 07 15 12 49	25 mm	5	2	12	M 6 x 1

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA-FLEX

Izstrādājums

Apzīmējums	Ø virzulim	Gājiens (mm)	Konstrukcija	Ø virzuļkātam (mm)	Virzuļkāta iekšējā vītne
K- 07 15 12 50	25 mm	10	2	12	M 6 x 1
K- 07 15 12 51	25 mm	20	2	12	M 6 x 1
K- 07 15 12 52	25 mm	25	2	12	M 6 x 1
K- 07 15 12 53	25 mm	30	2	12	M 6 x 1
K- 07 15 12 54	25 mm	35	2	12	M 6 x 1
K- 07 15 12 55	25 mm	40	2	12	M 6 x 1
K- 07 15 12 56	25 mm	45	2	12	M 6 x 1
K- 07 15 12 57	25 mm	50	2	12	M 6 x 1
K- 07 15 12 58	25 mm	55	2	12	M 6 x 1
K- 07 15 12 59	25 mm	60	2	12	M 6 x 1
K- 07 15 12 60	25 mm	70	2	12	M 6 x 1
K- 07 15 12 61	25 mm	75	2	12	M 6 x 1
K- 07 15 12 62	25 mm	80	2	12	M 6 x 1
K- 07 15 12 63	32 mm	5	3	16	M 8 x 1.25
K- 07 15 12 64	32 mm	10	3	16	M 8 x 1.25
K- 07 15 12 65	32 mm	20	3	16	M 8 x 1.25
K- 07 15 12 66	32 mm	25	3	16	M 8 x 1.25
K- 07 15 12 67	32 mm	30	3	16	M 8 x 1.25
K- 07 15 12 68	32 mm	35	3	16	M 8 x 1.25
K- 07 15 12 69	32 mm	40	3	16	M 8 x 1.25
K- 07 15 12 70	32 mm	45	3	16	M 8 x 1.25
K- 07 15 12 71	32 mm	50	3	16	M 8 x 1.25
K- 07 15 12 72	32 mm	55	3	16	M 8 x 1.25
K- 07 15 12 73	32 mm	60	3	16	M 8 x 1.25
K- 07 15 12 74	32 mm	70	3	16	M 8 x 1.25
K- 07 15 12 75	32 mm	75	3	16	M 8 x 1.25
K- 07 15 12 76	32 mm	80	3	16	M 8 x 1.25
K- 07 15 12 77	40 mm	5	3	16	M 8 x 1.25
K- 07 15 12 78	40 mm	10	3	16	M 8 x 1.25
K- 07 15 12 79	40 mm	20	3	16	M 8 x 1.25
K- 07 15 12 80	40 mm	25	3	16	M 8 x 1.25
K- 07 15 12 81	40 mm	30	3	16	M 8 x 1.25
K- 07 15 12 82	40 mm	35	3	16	M 8 x 1.25
K- 07 15 12 83	40 mm	40	3	16	M 8 x 1.25
K- 07 15 12 84	40 mm	45	3	16	M 8 x 1.25
K- 07 15 12 85	40 mm	50	3	16	M 8 x 1.25
K- 07 15 12 86	40 mm	55	3	16	M 8 x 1.25
K- 07 15 12 87	40 mm	60	3	16	M 8 x 1.25
K- 07 15 12 88	40 mm	70	3	16	M 8 x 1.25
K- 07 15 12 89	40 mm	75	3	16	M 8 x 1.25
K- 07 15 12 90	40 mm	80	3	16	M 8 x 1.25
K- 07 15 12 91	50 mm	5	3	20	M 10 x 1.5
K- 07 15 12 92	50 mm	10	3	20	M 10 x 1.5
K- 07 15 12 93	50 mm	20	3	20	M 10 x 1.5
K- 07 15 12 94	50 mm	25	3	20	M 10 x 1.5
K- 07 15 12 95	50 mm	30	3	20	M 10 x 1.5
K- 07 15 12 96	50 mm	35	3	20	M 10 x 1.5
K- 07 15 12 97	50 mm	40	3	20	M 10 x 1.5
K- 07 15 12 98	50 mm	45	3	20	M 10 x 1.5
K- 07 15 12 99	50 mm	50	3	20	M 10 x 1.5
K- 07 15 13 00	50 mm	55	3	20	M 10 x 1.5
K- 07 15 13 01	50 mm	60	3	20	M 10 x 1.5
K- 07 15 13 02	50 mm	70	3	20	M 10 x 1.5
K- 07 15 13 03	50 mm	75	3	20	M 10 x 1.5
K- 07 15 13 04	50 mm	80	3	20	M 10 x 1.5
K- 07 15 13 05	63 mm	5	3	20	M 10 x 1.5
K- 07 15 13 06	63 mm	10	3	20	M 10 x 1.5
K- 07 15 13 07	63 mm	20	3	20	M 10 x 1.5
K- 07 15 13 08	63 mm	25	3	20	M 10 x 1.5
K- 07 15 13 09	63 mm	30	3	20	M 10 x 1.5
K- 07 15 13 10	63 mm	35	3	20	M 10 x 1.5
K- 07 15 13 11	63 mm	40	3	20	M 10 x 1.5

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA-FLEX

Izstrādājums

Apzīmējums	Ø virzulim	Gājiens (mm)	Konstrukcija	Ø virzuļkātam (mm)	Virzuļkāta iekšējā vītne
K- 07 15 13 12	63 mm	45	3	20	M 10 x 1.5
K- 07 15 13 13	63 mm	50	3	20	M 10 x 1.5
K- 07 15 13 14	63 mm	55	3	20	M 10 x 1.5
K- 07 15 13 15	63 mm	60	3	20	M 10 x 1.5
K- 07 15 13 16	63 mm	70	3	20	M 10 x 1.5
K- 07 15 13 17	63 mm	75	3	20	M 10 x 1.5
K- 07 15 13 18	63 mm	80	3	20	M 10 x 1.5
K- 07 15 13 19	80 mm	5	3	25	M 16 x 2
K- 07 15 13 20	80 mm	10	3	25	M 16 x 2
K- 07 15 13 21	80 mm	20	3	25	M 16 x 2
K- 07 15 13 22	80 mm	25	3	25	M 16 x 2
K- 07 15 13 23	80 mm	30	3	25	M 16 x 2
K- 07 15 13 24	80 mm	35	3	25	M 16 x 2
K- 07 15 13 25	80 mm	40	3	25	M 16 x 2
K- 07 15 13 26	80 mm	45	3	25	M 16 x 2
K- 07 15 13 27	80 mm	50	3	25	M 16 x 2
K- 07 15 13 28	80 mm	55	3	25	M 16 x 2
K- 07 15 13 29	80 mm	60	3	25	M 16 x 2
K- 07 15 13 30	80 mm	70	3	25	M 16 x 2
K- 07 15 13 31	80 mm	75	3	25	M 16 x 2
K- 07 15 13 32	80 mm	80	3	25	M 16 x 2
K- 07 15 12 01	100 mm	5	3	32	M 20 x 2.5
K- 07 15 12 02	100 mm	10	3	32	M 20 x 2.5
K- 07 15 12 03	100 mm	20	3	32	M 20 x 2.5
K- 07 15 12 04	100 mm	25	3	32	M 20 x 2.5
K- 07 15 12 05	100 mm	30	3	32	M 20 x 2.5
K- 07 15 12 06	100 mm	35	3	32	M 20 x 2.5
K- 07 15 12 07	100 mm	40	3	32	M 20 x 2.5
K- 07 15 12 08	100 mm	45	3	32	M 20 x 2.5
K- 07 15 12 09	100 mm	50	3	32	M 20 x 2.5
K- 07 15 12 10	100 mm	55	3	32	M 20 x 2.5
K- 07 15 12 11	100 mm	60	3	32	M 20 x 2.5
K- 07 15 12 12	100 mm	70	3	32	M 20 x 2.5
K- 07 15 12 13	100 mm	75	3	32	M 20 x 2.5
K- 07 15 12 14	100 mm	80	3	32	M 20 x 2.5

Piederumi

K-FUSSBEFESTIGUNG TYP LB 3	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA2	Flange model, »FA« type
K-SCHWENKGABELBEFESTIG CB 1	Female hinge model, »CB« type
K-GABELKOEPFE TYP Y SET 1	Fork model, »Y« type (incl. threaded adapter)
K-GELENKAUGEN TYP UNIT SET 1	Rod eye model, »UNIT« type (incl. threaded adapter)
K-SENSOREN CS1 KH MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 KH OHNE STECKER	Sensors »CS1« type, cable without plug

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.