


K-X-STECKVERBINDUNG 1

X-unions

HANSA FLEX

Īpašības

| | |
|----------------------------|------------------|
| Darba spiediens | Max. 16 bar |
| Ekspluatācijas temperatūra | -20 °C to +80 °C |
| Materiāls | Niķelēts misiņš |
| Piespiedējgredzens | Hostaform |
| Iespīlēšanas gredzens | Stainless steel |

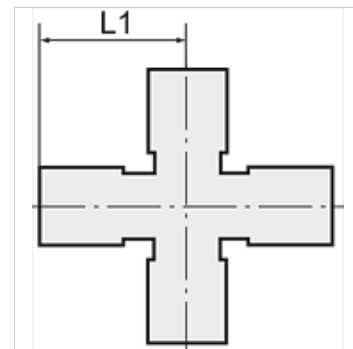

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Izstrādājums

| Apzīmējums | šļūtenes ārējam Ø | L1 (mm) |
|----------------|-------------------|------------|
| K- 07 40 47 29 | 4 mm | 18,6 |
| K- 07 40 47 30 | 6 mm | 21,9 |
| K- 07 40 47 31 | 8 mm | 25,4 |