



# K-XRD STECKANSCHLUSS Z GEW AGR-K BE

Straight non-return valves, flow direction from tube to port, conical male thread, coated

**HANSA FLEX**

## Īpašības

|                        |  |
|------------------------|--|
| Darba spiediens        | Max. 10 bar, vacuum                      |
| Izmantošana            | Air, vacuum                              |
| Ieteicamās šļūtenes    | PU or PA (nylon)                         |
| Darba vides            | Saspiests gaiss                          |
| Standarts              | R thread acc. to ISO 7-1, thread coating |
| Temperatūras diapazons | 0 °C to +60 °C                           |
| Bļivēšanas virsma      | Conical version: thread coating          |
| Materiāls              | Plastic, Nickel plated brass             |
| Piespiedējgredzens     | Plastic                                  |

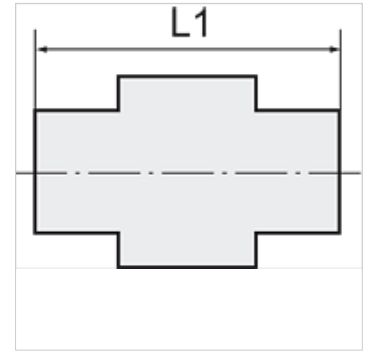

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Izstrādājums

| Apzīmējums     | Vītnes | šļūtenes ārējam Ø | L1 (mm) | Sākotnējais spiediens (bar) | SW    |
|----------------|--------|-------------------|---------|-----------------------------|-------|
| K- 07 40 08 97 | R 1/8  | 4 mm              | 24,0    | 0,2                         | 10 mm |
| K- 07 40 08 98 | R 1/8  | 6 mm              | 31,0    | 0,2                         | 12 mm |
| K- 07 40 08 99 | R 1/8  | 8 mm              | 32,8    | 0,2                         | 14 mm |
| K- 07 40 08 95 | R 1/4  | 6 mm              | 33,0    | 0,2                         | 14 mm |
| K- 07 40 08 96 | R 1/4  | 8 mm              | 34,8    | 0,2                         | 14 mm |
| K- 07 40 09 00 | R 3/8  | 10 mm             | 41,0    | 0,2                         | 17 mm |
| K- 07 40 09 01 | R 3/8  | 12 mm             | 42,5    | 0,2                         | 21 mm |
| K- 07 40 08 93 | R 1/2  | 10 mm             | 43,0    | 0,2                         | 21 mm |
| K- 07 40 08 94 | R 1/2  | 12 mm             | 44,5    | 0,2                         | 21 mm |