

# K-SCHALLDAE FEDEREINSTELLUNG


Adjustable spring silencers

**HANSA FLEX**

## Īpašības

Ekspluatācijas spiediens maks. 12 bar

Ekspluatācijas temperatūra -10 °C to +80 °C

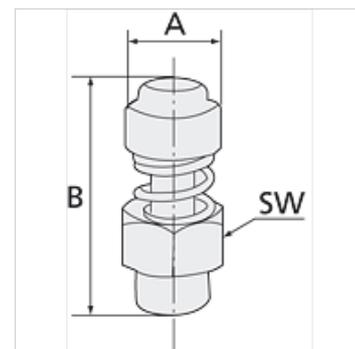

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Izstrādājums

| Apzīmējums     | Vītnes | A<br>(mm) | B maks<br>(mm) | B min<br>(mm) | SW    |
|----------------|--------|-----------|----------------|---------------|-------|
| K- 07 40 34 64 | G 1/8  | 12,0      | 28,0           | 26,0          | 13 mm |
| K- 07 40 34 65 | G 1/4  | 14,0      | 32,0           | 30,0          | 15 mm |
| K- 07 40 34 66 | G 3/8  | 17,0      | 38,0           | 36,0          | 22 mm |
| K- 07 40 34 67 | G 1/2  | 17,0      | 39,0           | 37,0          | 22 mm |
| K- 07 40 34 68 | G 3/4  | 32,0      | 50,0           | 46,0          | 30 mm |
| K- 07 40 34 69 | G 1    | 32,0      | 50,0           | 47,0          | 36 mm |