
K-T-VB PP
Union tees

Īpašības

Darba spiediens	on request
Ekspluatācijas temperatūra	Max. +20 °C
Materiāls	Polypropylene (PP)
Blīvēšanas materiāls	NBR



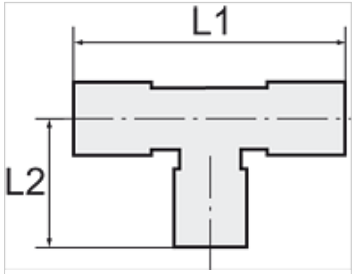

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Izstrādājums

Apzīmējums	šļūtenes ārējam Ø	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.