


K-L-STECKVER ABSP DREH AG OR

Angle stop valves, swivel type, parallel male thread with O-ring

HANSA FLEX

Īpašības

Darba spiediens	Max. 10 bar, vacuum
Izmantošana	Air, vacuum
Ieteicamās šļūtenes	PU or PA (nylon)
Darba vides	Saspiests gaiss
Standarts	G thread acc. to DIN EN ISO 228-1, with O-Ring
Temperatūras diapazons	0 °C to +60 °C
Bīvēšanas virsma	O-ring (NBR)
Materiāls	Plastic, Nickel plated brass
Piespiedējgredzens	Plastic

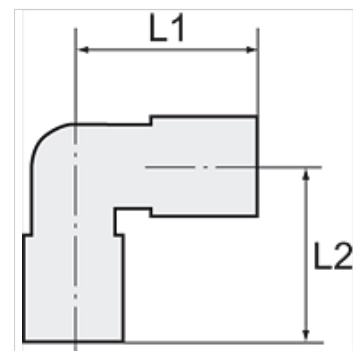

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

The air supply is completely shut off as soon as the hose is disconnected from the union.
The flow rate is only guaranteed if the hose is securely inserted.

Izstrādājums

Apzīmējums	Vītnes	šļūtenes ārējais Ø	L1 (mm)	L2 (mm)	SW
K- 07 40 08 46	M 5	4 mm	31,0	21,3	10 mm
K- 07 40 08 47	M 5	6 mm	29,4	21,7	12 mm
K- 07 40 08 40	G 1/8	4 mm	31,0	24,3	14 mm
K- 07 40 08 41	G 1/8	6 mm	29,4	24,2	14 mm
K- 07 40 08 42	G 1/8	8 mm	33,0	27,0	14 mm
K- 07 40 08 38	G 1/4	6 mm	29,4	26,7	17 mm
K- 07 40 08 39	G 1/4	8 mm	33,0	29,5	17 mm
K- 07 40 08 37	G 1/4	10 mm	42,5	34,3	17 mm
K- 07 40 08 45	G 3/8	8 mm	33,0	30,0	20 mm
K- 07 40 08 43	G 3/8	10 mm	42,5	34,3	20 mm
K- 07 40 08 44	G 3/8	12 mm	46,5	36,0	21 mm
K- 07 40 08 35	G 1/2	10 mm	42,5	37,8	24 mm
K- 07 40 08 36	G 1/2	12 mm	46,5	39,0	24 mm